



**Calhoun: The NPS Institutional Archive**  
**DSpace Repository**

---

Reports and Technical Reports

All Technical Reports Collection

---

1995-04

# Janus modeling for the Environmental Effects for Distributed Interactive Simulation (E2DIS) program

Mansager, Bard K.

Monterey, California. Naval Postgraduate School

---

<http://hdl.handle.net/10945/24430>

---

*Downloaded from NPS Archive: Calhoun*



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

**Dudley Knox Library / Naval Postgraduate School**  
**411 Dyer Road / 1 University Circle**  
**Monterey, California USA 93943**

<http://www.nps.edu/library>

# NAVAL POSTGRADUATE SCHOOL Monterey, California



"Original contains color plates; All DTIC reproductions will be in black and white"

**JANUS MODELING FOR THE ENVIRONMENTAL  
EFFECTS FOR DISTRIBUTED INTERACTIVE  
SIMULATION (E<sup>2</sup>DIS) PROGRAM**

by

Bard K. Mansager

April 1995

Report for Period  
October 1993 - February 1994

Approved for public release; distribution unlimited

Prepared for: Naval Postgraduate School  
Monterey, CA 93943

DTIC QUALITY INSPECTED 8

19950602 017

NAVAL POSTGRADUATE SCHOOL  
MONTEREY, CA 93943


Rear Admiral T.A. Mercer  
Superintendent

Harrison Shull  
Provost


This report was prepared in conjunction with research conducted for the Naval Postgraduate School and funded by the Naval Postgraduate School.

Reproduction of all or part of this report is authorized.


This report was prepared by:

  
Bard K. Mansager  
Lecturer of Mathematics

Reviewed by:

  
RICHARD FRANKE  
Chairman

Released by:

  
PAUL J. MARTO  
Dean of Research

Accession For	
NTIS	CRA&I <input checked="" type="checkbox"/>
DTIC	TAB <input type="checkbox"/>
Unannounced <input type="checkbox"/>	
Justification .....	
By .....	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

<b>1. AGENCY USE ONLY (Leave blank)</b>	<b>2. REPORT DATE</b> April 1, 1995	<b>3. REPORT TYPE AND DATES COVERED</b> Technical Report Oct 1993 - Feb 1994	
<b>4. TITLE AND SUBTITLE</b> Janus Modeling for the Environmental Effects for Distributed Interactive Simulation (E <sup>2</sup> DIS) Program		<b>5. FUNDING NUMBERS</b>	
<b>6. AUTHOR(S)</b>  Bard K. Mansager			
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> Naval Postgraduate School Monterey, CA 93943-5000		<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>  NPS-MA-95-004	
<b>9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> TRAC - Mtry Naval Postgraduate School Monterey, CA 93943		<b>10. SPONSORING / MONITORING AGENCY REPORT NUMBER</b>	
<b>11. SUPPLEMENTARY NOTES</b> The views expressed in this report are those of the authors and do not reflect the official policy or position of the Department of Defense or the U.S. Government.			
<b>12a. DISTRIBUTION / AVAILABILITY STATEMENT</b>  Approved for public release; distribution is unlimited.		<b>12b. DISTRIBUTION CODE</b>	
<b>13. ABSTRACT (Maximum 200 words)</b> The Defense Modeling and Simulation Office (DMSO) has initiated a research effort to promote joint service standards for physics based environmental effects in the existing distributed modeling and simulation networks. Collectively, the project is known as Environmental Effects for Distributed Interactive Simulation (E <sup>2</sup> DIS). Research detailed in this report was within the E <sup>2</sup> DIS Demonstration Task effort. This effort used the Janus (A) combat model to simulate the environmental effects on weapons systems and study the resultant force-on-force interplay. In order to do this, a scenario was developed using Fort Hunter Liggett, California terrain. In this scenario, Unmanned Aerial Vehicles (UAVs) were used to search for a Ground Launched Cruise Missiles (GLCM) and SCUD Theater Ballistic Missiles (TBMs) and Transporter Erector Launchers (TELs). Once located, a Fiber Optic Guided Missile (FOG-M) was fired at the TEL. Weather parameters were changed and the scenario was repeated. Differences between the number of TEL detections in different weather conditions were recorded.			
<b>14. SUBJECT TERMS</b>  Distributed Interactive Simulation, Janus Combat Simulation		<b>15. NUMBER OF PAGES</b>	
		<b>16. PRICE CODE</b>	
<b>17. SECURITY CLASSIFICATION OF REPORT</b>  UNCLASSIFIED	<b>18. SECURITY CLASSIFICATION OF THIS PAGE</b>  UNCLASSIFIED	<b>19. SECURITY CLASSIFICATION OF ABSTRACT</b>  UNCLASSIFIED	<b>20. LIMITATION OF ABSTRACT</b>

Janus Modeling For The Environmental Effects For  
Distributed Interactive Simulation ( $E^2DIS$ )  
Program

Bard K. Mansager  
Mathematics Department  
Naval Postgraduate School  
Monterey, CA 93943

April, 1995

## ABSTRACT

The Defense Modeling and Simulation Office (DMSO) has initiated a research effort to promote joint service standards for physics based environmental effects in the existing distributed modeling and simulation networks. Collectively, the project is known as Environmental Effects for Distributed Interactive Simulation (E<sup>2</sup>DIS). Research detailed in this report was within the E<sup>2</sup>DIS model to simulate the environmental effects on weapons systems and study the resultant force-on-force interplay. In order to do this, a scenario was developed using Fort Hunter Liggett, California terrain. In this scenario, Unmanned Aerial Vehicles (UAVs) were used to search for a Ground Launched Cruise Missiles (GLCM) and SCUD Theater Ballistic Missiles (TBMs) and Transporter Erector Launchers (TELs). Once located, a Fiber Optic Guided Missile (FOG-M) was fired at the TEL. Weather parameters were changed and the scenario was repeated. Differences between the number of TEL detections in different weather conditions were recorded.

# 1 Introduction

Realistic simulation of a dynamic virtual battlefield environment, combatants, and the responses of virtual sensor systems require the use of high resolution models. Current warfighting models lack the incorporation of high fidelity environmental effects and hence the full potential of these models is not realized. The Defense Modeling and Simulation Office (DMSO) has initiated a research effort to promote joint service standards for these physics based environmental effects in the existing distributed modeling and simulation networks. Collectively, the project is known as Environmental Effects for Distributed Interactive Simulation ( $E^2DIS$ ).

Research detailed in this report was within the  $E^2DIS$  Demonstration Task effort. This effort used the Janus(A) combat model to simulate the environmental effects on weapons systems and study the resultant force-on-force interplay. In order to do this, a scenario was developed using Fort Hunter Liggett, California terrain. In this scenario, Unmanned Aerial Vehicles (UAVs) were used to search for a Ground Launched Cruise Missiles (GLCM) and SCUD Theater Ballistic Missile (TBM) Transporter Erector Launchers (TELs). Once located, a Fiber Optic Guided Missile (FOG-M) was fired at the TEL. Weather parameters were changed and the scenario was repeated. Differences between the number of TEL detections in different weather conditions were recorded.

This report will first briefly describe the  $E^2DIS$  program, focusing on the Demonstration Task Area. Next, the scenario will be presented. Section 4 presents a discussion of the model representation of the UAVs with different sensor packages. The weather parameters used in Janus(A) are described in Section 5. The report concludes with the results of this effort and future modeling directions to support the  $E^2DIS$  program.

## 2 $E^2DIS$ Program

Currently models and simulations lack the ability to incorporate high fidelity environmental effects into their model structure. This is perceived as a major limitation hindering the realism of the existing combat models and simulations. In May 1992, DMSO established as a major goal the development of synthetic environments. This product will allow environmental data that are varying with respect to time and space, such as terrain, atmosphere, and ocean effects, to be incorporated into the model.

The  $E^2DIS$  Program Office has established a Program Development Plan (PDP) detailing how the above goal will be achieved. The PDP subdivides the mission into seven task areas: Architecture, Standards, Environmental Representations, Environmental Effects and Processes, Survey of Requirements and Capabilities, Demonstration and Management and Integration. This research was part of the Demonstration Task Area [1, p 56].

The PDP states that the objective of the Demonstration Task Area is: to plan, design, construct and conduct the demonstration of the effects of realistic environments on weapon system performance through the incorporation of environmental models and processes into Distributed Interactive Simulations integrated with real-time, force-on-force, field exercises.

The PDP lists detailed requirements and characteristics of the Task Area which are given in Appendix A.

The objective of the  $E^2DIS$  initial simulation is to demonstrate the DIS-compatible integration of realistic environmental and sensor models and to show their effect on detecting targets. Figure 1 portrays the interaction of ground players and the  $E^2DIS$  Architecture during the initial scenario.

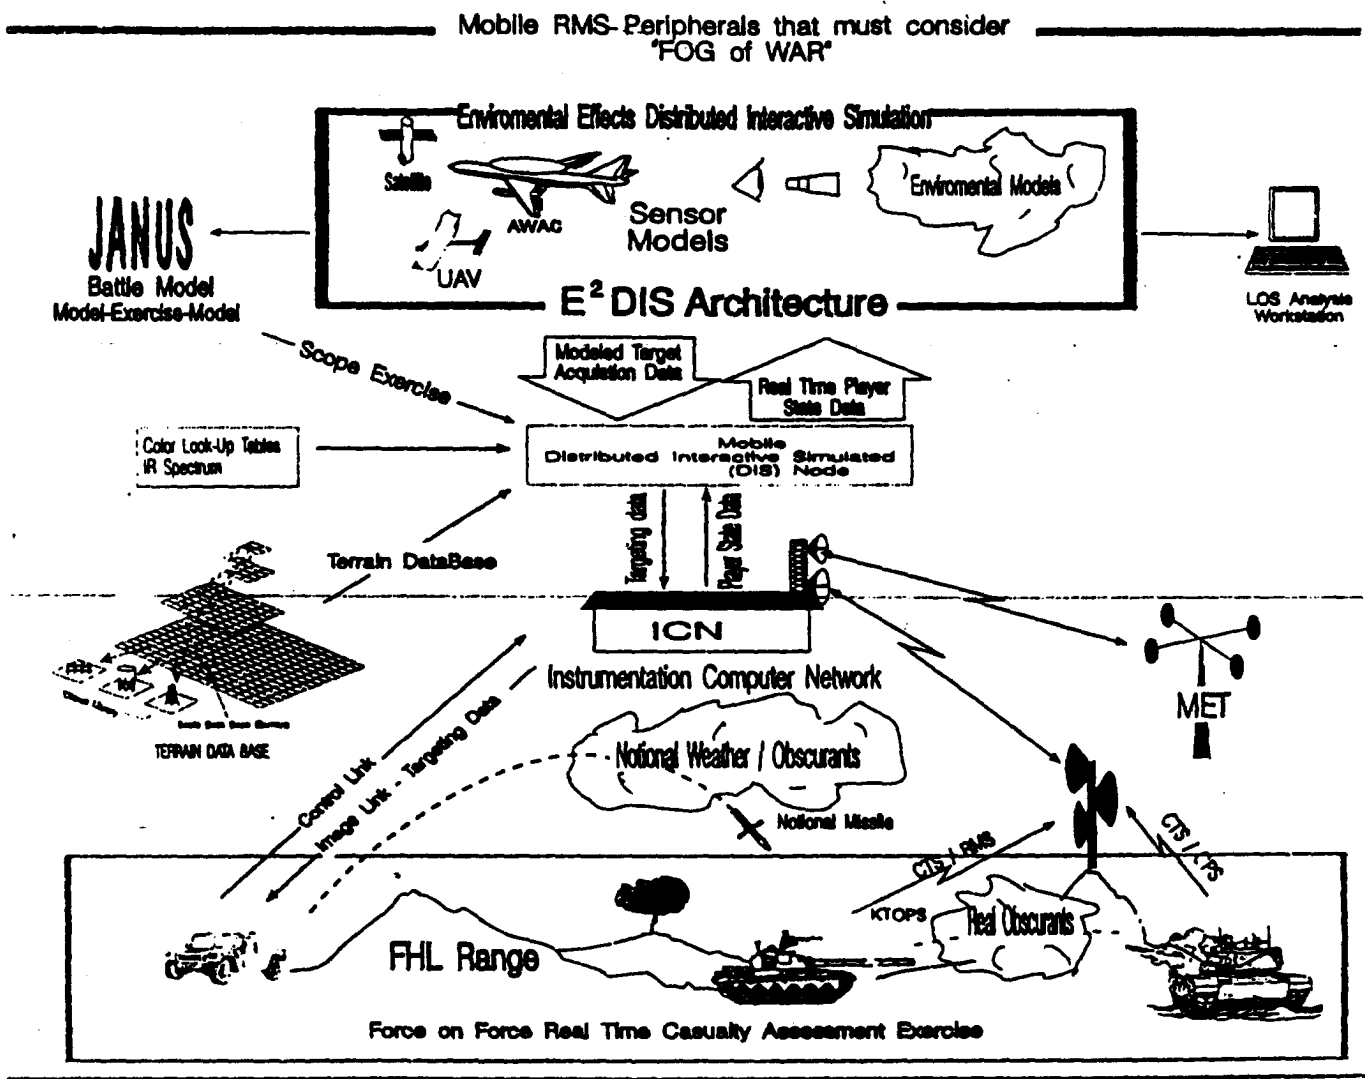


Figure 1:  $E^2DIS$  Components



To elaborate, actual ground players at Fort Hunter Liggett represented GLCM and TBM threat units. These entities were instrumented with position location systems and provided "live" player location data to the "simulated" players. Additionally, the "live" forces were video recorded to collect actual dust and vehicle-generated smoke information. "Simulated" players including UAV's, an Advanced Infrared Warning System (AWS) satellite in geostationary orbit, and one E2C aircraft with Aircraft Surveillance Radar (ASR) were all positioned to observe the TBM and GLCM launch area. There was a simultaneous exchange of data between the "live" players and the "simulated" players. Real time "live" player location data is communicated into the *E<sup>2</sup>DIS* Architecture and target acquisition data from the "simulated" players is communicated to the "live" ground players at Fort Hunter Liggett. The scenario captures the interplay of "simulated" players reacting to real time position location data and the "live" players making appropriate responses to "simulated" acquisitions. The scenario is outlined in the next section.

Janus was used to develop and improve the initial scenario. It also provided the UAV component to the "simulated" players. In that role, Janus was used to demonstrate environmental effects on the UAV performance using generic clear and foggy weather.

### 3 Scenario

The scenario was intended to parallel the Operation Desert Storm experience in trying to find SCUD missile launchers. The terrain used was Fort Hunter Liggett, California which included a threat force of Al Hussein class theater ballistic missiles (TBMs), SSC-4 class ground-launched cruise missiles (GLCMs) and associated Transporter Erector Launchers (TELs). Friendly forces had determined that there is a high probability of a missile attack and had begun to search the enemy terrain capable of hiding missile launchers.

The search was accomplished by using Unmanned Aerial Vehicles (UAV) flying over the most likely locations that could support TBMs and associated equipment. The modeling of the UAVs will be discussed in greater detail in the next section. The AWS satellite and the E2C aircraft were not played in the Janus scenario. UAVs used a search pattern shown in Figure 2.

It was assumed that TELs had to be located in close proximity to a hard surface road and required a relatively flat, unobstructed area to launch. This limited the search to the valley areas at Fort Hunter Liggett increasing the probability of TEL detection, particularly when the TELs were moving or at a launch site. These areas of likely launch are known as "launch buckets". UAVs provided continuous coverage in the search area using on station relief by other UAVs.

The three TBM TELs and one GLCM TEL were tactically employed as depicted in Figure 3 below. This figure shows the beginning location of each system indicated by the red icon. The scenario began with the TELs being armed, fueled and ready to launch. The GLCM TEL launched four GLCMs in succession and then each of the TBM TELs launched its missile at one minute intervals. After launching its missile(s), the TELs proceeded to the hide position at the end of the orange "trail". Also depicted on Figure 3 is a number below the icon representing a timing node that keeps the system in the start position for the number

of indicated minutes. When the simulation's clock reaches that point of time, the TEL begins movement along the orange path and terminates in its hide position. Consequently, the 3, 4, and 5 allows the model to play the subsequent launches by the TBM TELs. Additionally, a command and control element for the launchers was included as a player and positioned on high ground to insure radio communication with the launch sites.

UAVs were able to detect the TELs while they were in their launch location or while transiting to their hide positions. Five minutes following such a detection, a Fiber Optically Guided Missile (FOG-M) was fired at the detected system [2].

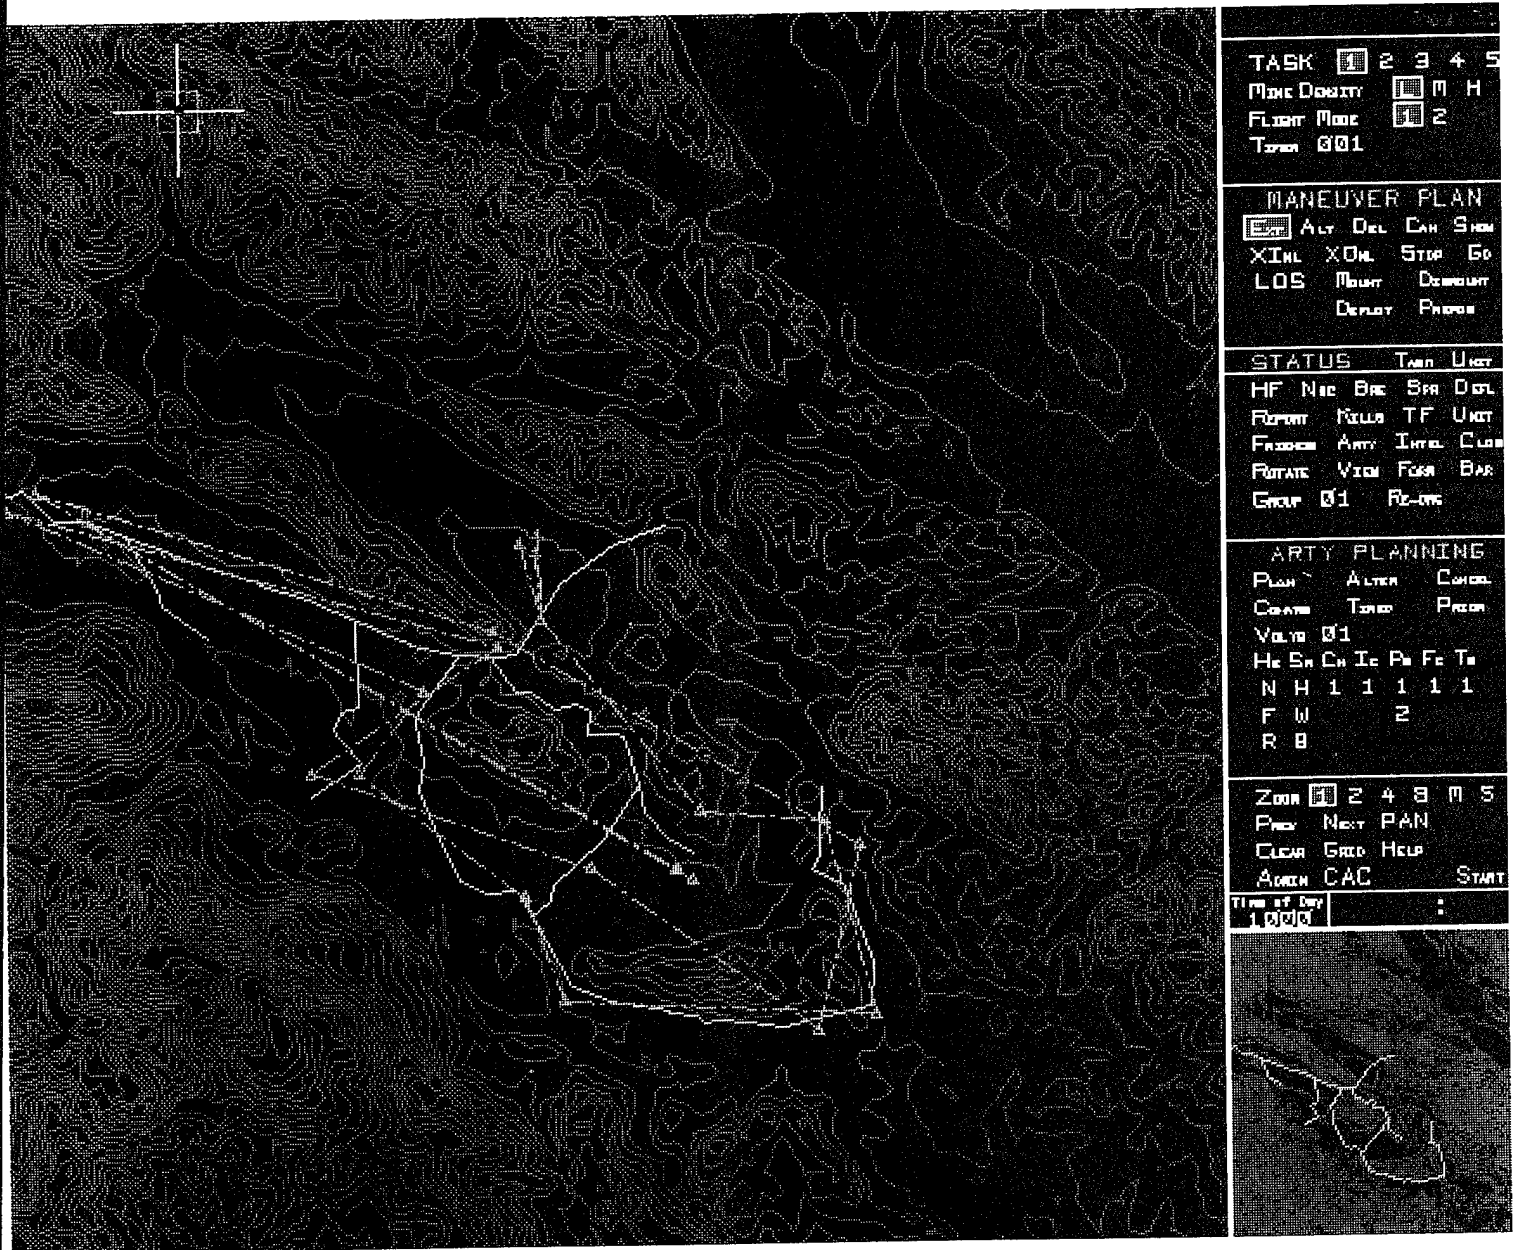


Figure 2: UAV Search Patterns

A,B,C: TEL Fire/Hide Locations,  
TEL Movements

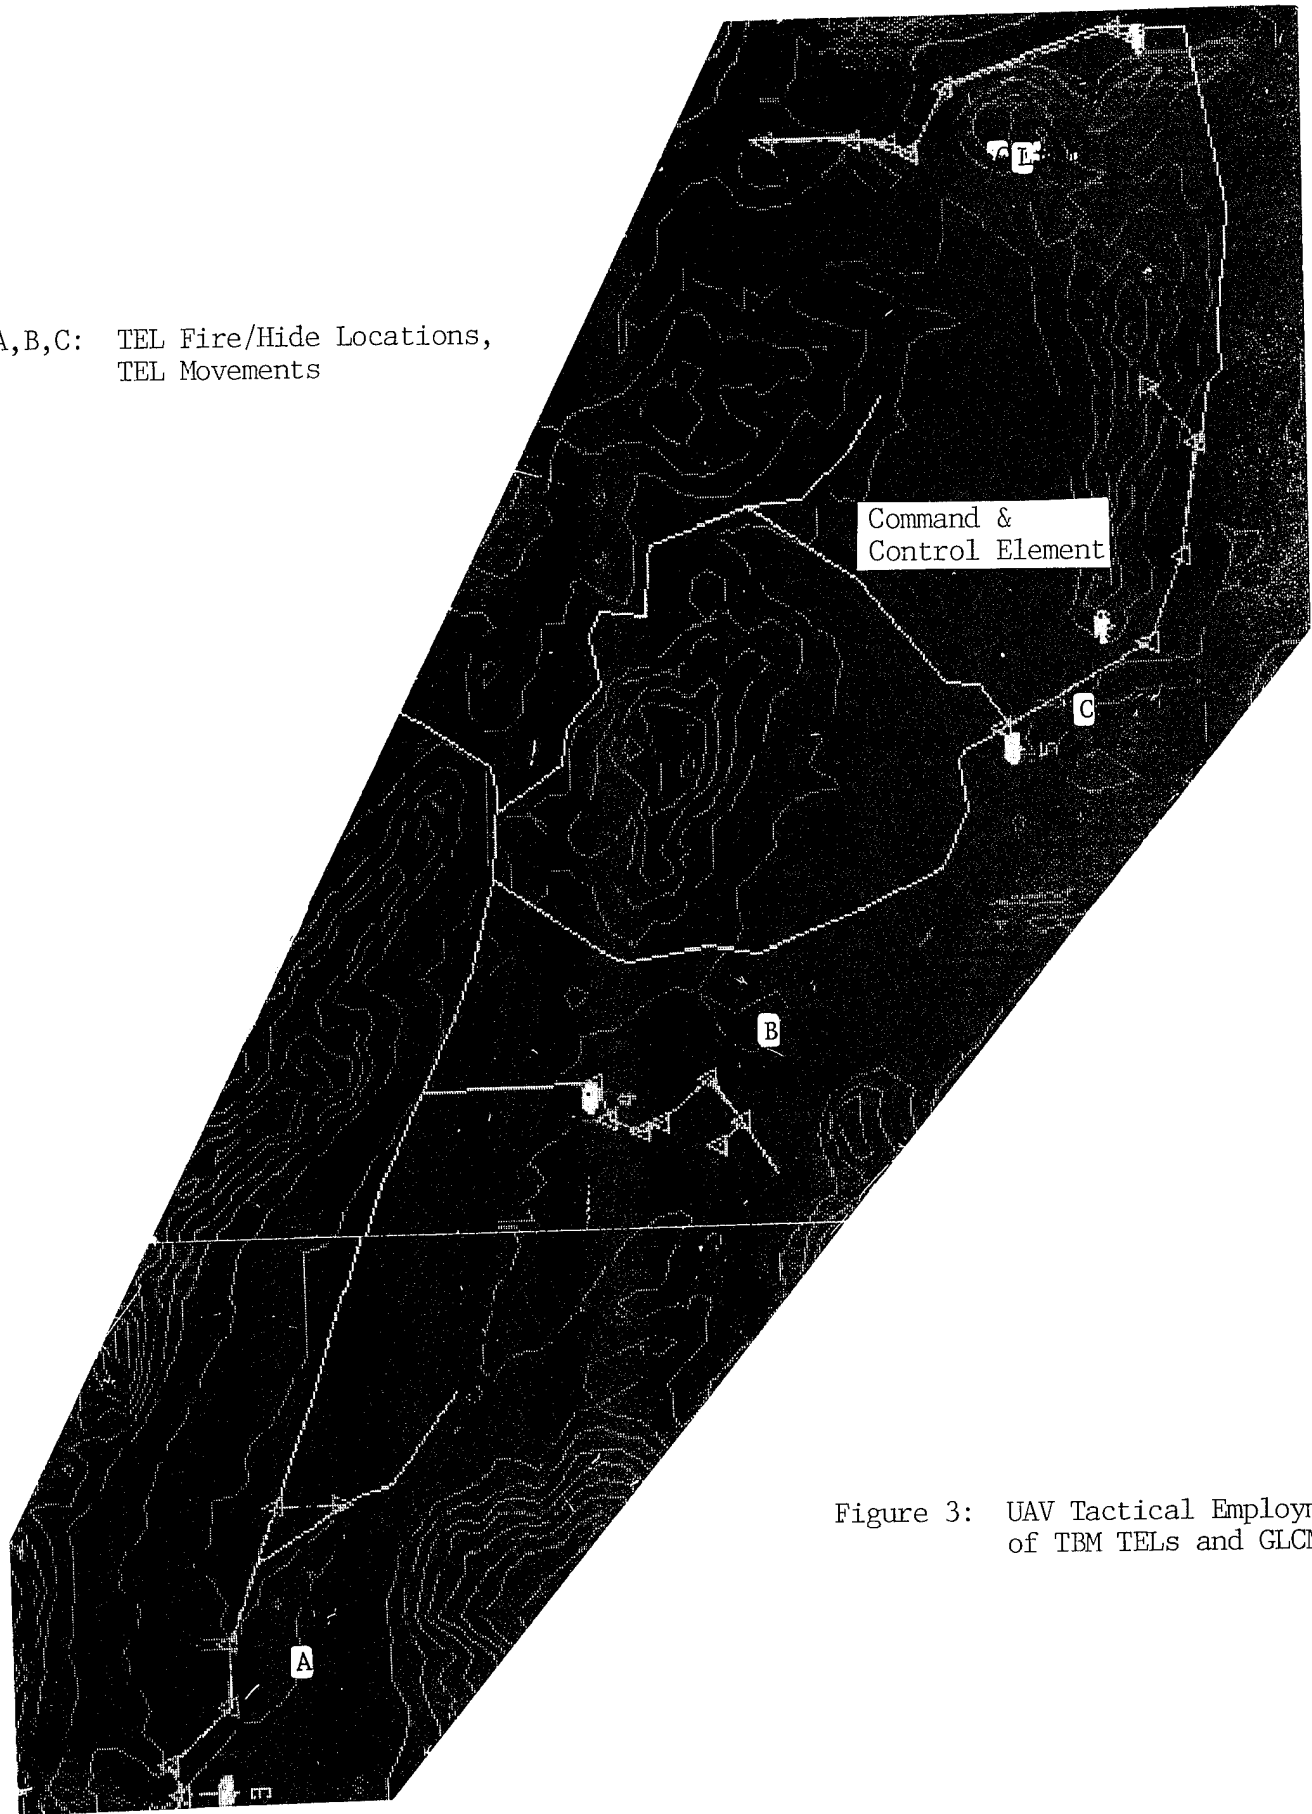


Figure 3: UAV Tactical Employment  
of TBM TELs and GLCM

## 4 UAV Model

The Pioneer system shown in Figure 4 was selected as the UAV to be modeled in this scenario. The Pioneer can operate between 60 and 95 knots for up to five hours at altitudes to 12,000 feet. It has an operational range of over 100 NM from its Ground Control Station (GCS). The system was used in Operation Desert Storm where its mission range was between 20 to 80 NM at altitudes from 2500 to 5500 feet. Typical missions used the Pioneer for both day and night reconnaissance, surveillance, targeting, gunfire spotting and battle damage assessment. Both the radar cross section (RCS) and its IR signature make the Pioneer difficult to detect [3].

The Janus model representation of the Pioneer aircraft used an altitude of 1524 meters (5000 feet) and a velocity of 60 knots. Both of these parameters remained constant throughout the simulation. Janus also incorporates data for an enemy system detecting the UAV. In this scenario, Pioneer used a minimum detection dimension of one meter. This value is the smallest of the system's length, height or width. One meter was the width of the Pioneer. Janus also allows a parameter to be entered for the system's Thermal Contrast Class. This measures the difference in degrees Centigrade between the system and its background and ranges in value from .5 to 7.0 C. The lower the value, the smaller the contrast and hence the greater difficulty to detect [4]. This scenario used a value of 1.0 C. Modeled values adequately portray the RCS and IR signature for the Pioneer.

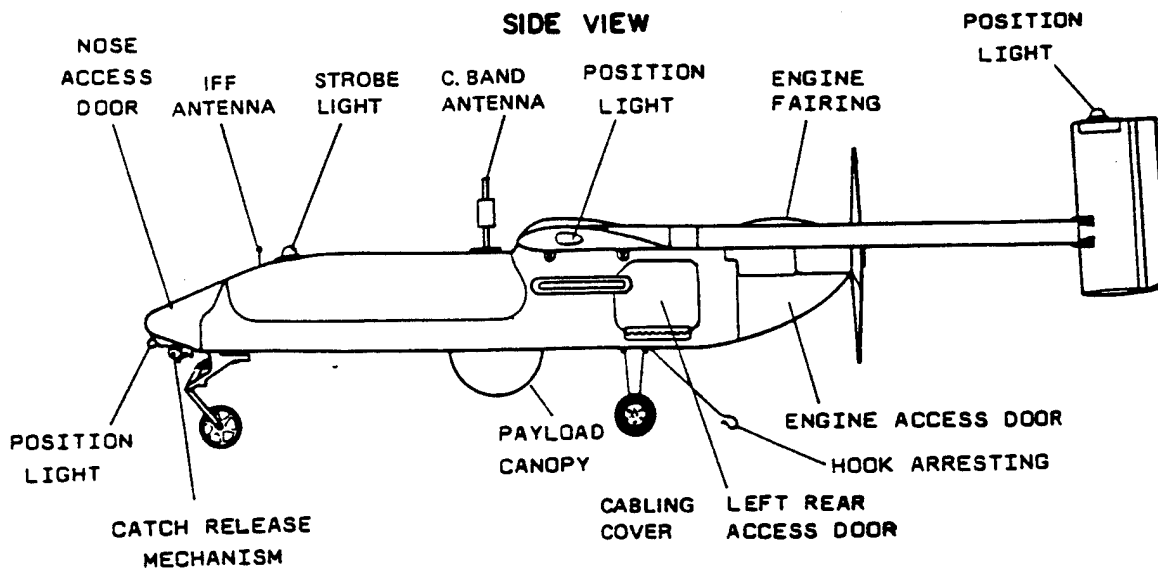


Figure 4: Pioneer UAV

The Pioneer has the capability of carrying different sensor packages. An optical sensor is used for day reconnaissance missions and thermal sensors are used in night or low visibility. The scenario used both optical and thermal sensors to gather detection data. Each sensor is modeled with a narrow and wide Field of View (FOV). The sensor initially searches using the wide view and switches to the narrow FOV when a detection occurs to further classify the target [4]. Data for the two UAVs played in this scenario are provided in Table 1 below.

Table 1: UAV Sensor Packages

UAV #	FOV (degrees)		
	Narrow	Wide	Spectrum
1	5.0	10.0	Thermal
2	5.1	10.0	Optical

## 5 Weather Implications

During this project, Janus was used to demonstrate a difference in UAV detections during “good” and “bad” weather conditions. Janus has the capability of representing up to 16 different weather options. Nine of these options are standard weather characteristics used in frequently occurring US Army scenarios. The Weather/Location Selection Screen for these Janus options is located in Appendix B. The “good” weather was represented by The Summer - 16.9 Km visibility - Desert Environment and the “bad” weather being Winter - 2 KM Visibility - Plains Environment. Exact data for each specific Weather Type is given in Appendix C [4].

Ten scenario runs were made for both weather types. Each run had both optical and thermal sensor packages on the UAV. To evaluate the difference several Measures of Performance (MOPs) were selected: the Mean Detection Range, the Number of Detections, Maximum Detection Range and the Minimum Detection Range. The collected data is summarized in Tables 2 and 3 below.

Table 2: MOP Results for Optical Sensor

MOP	Good Weather	Bad Weather
Mean Detection Range (Km)	1.735	0.545
Number of Detections	109	21
Max Detection Range (Km)	6.259	.601
Min Detection Range (Km)	.513	.511

Table 3: MOP Results for a Thermal Sensor

MOP	Good Weather	Bad Weather
Mean Detection Range (Km)	2.166	1.645
Number of Detections	33	11
Max Detection Range (Km)	4.686	1.737
Min Detection Range (Km)	1.601	1.607

The data show a pronounced difference for detections in good and bad weather for both the Mean Detection Range and the Number of Detections MOPs (by an order of magnitude for the optical sensor). The weather effect is also demonstrated in the Maximum Range of Detection for both sensors. The only MOP where the weather did not show a significant difference was for Minimum Range of Detection. This is not unreasonable since the values for this MOP are close to the minimum distance between the UAV's flight path and the TEL positions regardless of weather condition. The weather effects portrayed in Janus had a demonstrated and quantifiable effect upon UAV detections.

## 6 Conclusions

This research demonstrated the ability of Janus to develop a tactical scenario for use within the DIS environment. It further showed its ability to realistically portray UAVs in an operational scenario. All the important characteristics of the Pioneer UAV were captured within the Janus database. Finally, the two weather conditions used demonstrated Janus' capability to capture the environmental effects upon UAV detection performance. Again, the database structure allows a wide variety of weather conditions to be represented within the Janus simulation.

Future research work should incorporate actual weather and illumination parameters provided by Army Research Laboratory (ARL) and TRADOC Analysis Center - White Sands Missile Range (TRAC-WSMR) to measure their effects on detection MOPs. Additionally, the performance of UAVs within the Janus model, using a one meter terrain database should be investigated.

## 7 References

1. Defense Modeling and Simulation Office, "Environmental Effects for Distributed Interactive Simulation (E2DIS) Project Development Plan," 30 June 1993.
2. DeJonckheere, Richard, "Scenario for Initial  $E^2DIS$  Demonstration Working Group," Phillips Laboratory, Kirtland AFB, New Mexico, December 1993.
3. Soutter, Paul A., "On the Use of Unmanned Aerial Vehicles To Search for Tactical Ballistic Missile Transporter-Erector-Launchers," Master's Thesis, Naval Postgraduate School, Monterey, California, March 1994.
4. Department of the Army, "The Janus 3.X/UNIX Model User's Manual," TRADOC Analysis Center, Fort Leavenworth, Kansas, 1993.

# Appendix A

## 1.0 SUMMARY DESCRIPTION AND PURPOSE OF TASK AREA

### 1.1 Requirements

The objective of this task area is to plan, design, construct and conduct the demonstration of the effects of realistic environments on weapon system performance through the incorporation of environmental models and processes into Distributed Interactive Simulations integrated with real-time, force-on-force, field exercises. This will require simulation of:

- High-fidelity, first-principle physics descriptions of the terrain, atmosphere (ground to space), and weather;
- RF/MMW/IR/VIS/UV signals generated by man made and natural objects and their propagation through the environments;
- Scenes of backgrounds, foregrounds and imbedded targets incident on sensor apertures/antennas;
- Scene/signal processing through selected sensor subsystem modules;
- Communication of the processed data/signals to interested users;
- Output of processed data/signals on weapon system screens/displays; and
- Response of a human-in-the-loop or unmanned vehicle in the loop.

Atmospheric/terrain models, effects, and processes that should be demonstrated include:

- Ionospheric, magnetospheric and other space environments;
- Atmospheric profiles of temperature, density, and pressure (special topics include the stratosphere, tropopause, jet streams, and other local/regional and diurnal/annual variations);
- Aerosols — dust, pollution, smoke, smog, and haze;
- Humidity/moisture/precipitation — clouds, rain, fog, drizzle, snow, icing, and storms,
- Atmospheric turbulence and winds;
- Terrain features — roughness/distribution, discrettes, cultural features; and
- EO/EM propagation effects — absorption, attenuation, scattering, scintillation, refraction, diffraction, temporal and spatial structure, in-band emittance and transmittance, etc. due to atmospheric constituents.

Important characteristics of these simulations that will also be addressed include:

- Dynamic scalability of the environmental simulations (*i.e.*, the fidelity or level of spatial, temporal, and spectral structure);
- Sensitivity of system response to the approach for modeling certain environmental effects (*i.e.*, gridded versus feature-based);
- Simultaneity and consistency between the environmental description, the combatant state truth data, and the virtual battlefield description; and
- The degree of fidelity required for sensor and subsystem response.



# Appendix B

## Section 6: Weather Data

---

From the Combat Systems Data Editor menu screen, Figure 2.2, select WW to access the Weather/Location Selection screen, Figure 2.101.

Figure 2.101 Weather/Location Selection Chart Screen

Weather/Location	Option
WNT-7KM-PLAINS	1
WNT-14KM-DESERT	2
SMR-14KM-DESERT	3
SMR-5KMSD-DESERT	4
SMR-14KM-PLAINS	5
WNT-2KM-PLAINS	6
WNT-14KM-PLAINS	7
SPR-8KM-JUNGLE	8
SPR-3KMRN-DESERT	9
	10
	11
	12
	13
	14
	15
	16

SELECT OPTION -> XX

This screen permits selection of one of the sixteen possible weather options for data entry/editing.

## Appendix C

WEATHER TYPE,NAME: SUM-16.9KM DESERT	
Visibility.....	16900
Wind Direction(Deg from X-Axis,CCW).....	165
Wind Velocity (Km/Hr).....	20.8
EOSAELXscale Atmospheric Model (1-4).....	3
Air Mass Type (1=ma,2=mp,3=cp).....	3
Ceiling (Above ground Level,meters).....	2360
Relative Humidity (0.0 - 1.0).....	0.34
Temperature(Farenheit).....	74.8
Inversion Factor (0 - 5).....	3
Extinction Coef. Band 1.....0.2930	Sky-To-Ground Brightness Ratios
Extinction Coef. Band 2.....0.1490	0 Degrees..... 2.2
Extinction Coef. Band 3.....0.2220	45 Degrees..... 2.2
Extinction Coef. Band 4.....0.1270	90 Degrees..... 2.2
Optical Contrast.....0.35	135 Degrees..... 2.2
Sun Angle (Deg).....0.001	180 Degrees..... 2.2

WEATHER TYPE,NAME: 2KM FOG-PLAINS	
Visibility.....	2000
Wind Direction(Deg from X-Axis,CCW).....	15
Wind Velocity (Km/Hr).....	6.5
EOSAELXscale Atmospheric Model (1-4).....	1
Air Mass Type (1=ma,2=mp,3=cp).....	3
Ceiling (Above ground Level,meters).....	180
Relative Humidity (0.0 - 1.0).....	0.93
Temperature(Farenheit).....	28.5
Inversion Factor (0 - 5).....	2
Extinction Coef. Band 1..... 1.9500	Sky-To-Ground Brightness Ratios
Extinction Coef. Band 2..... 2.0340	0 Degrees..... 5.8
Extinction Coef. Band 3..... 2.6470	45 Degrees..... 5.8
Extinction Coef. Band 4..... 0.6770	90 Degrees..... 5.8
Optical Contrast..... 0.35	135 Degrees..... 5.8
Sun Angle (Deg)..... 0.45	180 Degrees..... 5.8

## DISTRIBUTION LIST

Director Defense Tech Information Center Cameron Station Alexandria, VA 22314	(2)
Research Office Code 81 Naval Postgraduate School Monterey, CA 93943	(1)
Library Code 52 Naval Postgraduate School Monterey, CA 93943	(2)
Professor Richard Franke Department of Mathematics Naval Postgraduate School Monterey, CA 93943	(1)
MAJ Charles Pate TRAC-Mtry Monterey, CA 93943	(3)
Dr. Richard deJonckheere Phillips Lab 3550 Aberdeen Dr., SE Kirtland AFB, NM 87117	(1)
Mr. Mike Tedeschi Hq., TEC Fort Hunter Liggett, CA 93928	(1)
Professor Bard K. Mansager Code MA/Ma Naval Postgraduate School Monterey, CA 93943	(10)