

Calhoun: The NPS Institutional Archive
DSpace Repository

Faculty and Researchers

Faculty and Researchers' Publications

2005-08

Vibration Effects in Short Rayleigh Length Fels

Crooker, P.P.; Armstead, R.L.; Blau, J.; Bowlin, O.E.;
Colson, W.B.; Vigil, R.; Voughs, T.; Williams, B.W.

<https://hdl.handle.net/10945/44042>

This publication is a work of the U.S. Government as defined in Title 17, United States Code, Section 101. Copyright protection is not available for this work in the United States.

Downloaded from NPS Archive: Calhoun



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

<http://www.nps.edu/library>

VIBRATION EFFECTS IN SHORT RAYLEIGH LENGTH FELS*

P.P. Crooker[†], R.L. Armstead, J. Blau, O.E. Bowlin, W.B. Colson,
R. Vigil, T. Voughs, and B.W. Williams
Naval Postgraduate School, Monterey, CA, USA

Abstract

The short-Rayleigh length FEL configuration leaves the optical resonator near the cold-cavity stability limit. Studies show that the electron beam interaction stabilizes the optical modes and establishes limits to the vibrations of mirrors and the electron beam. Several types of vibrations are considered.

INTRODUCTION

Two of the central issues in designing a compact high-power free electron laser are overall system size and the ability of the cavity mirrors to withstand intense optical fields without damage. One design solution is to use a short cavity to reduce the system length, along with a short Rayleigh range Z_0 in order to spread the optical mode over the mirrors and thereby reduce the optical intensity for a given power. Such an optical mode has narrow radius W_0 at the waist and wide radius W at the mirror – the magnification W/W_0 is then $S/2Z_0$ for a cavity of length S [1]. To achieve this small Z_0/S ratio, the mirror radii of curvature R must be only slightly greater than the cavity half-length $S/2$; for such a configuration the cavity stability factor $g = 1 - S/R$ is only slightly above the cold-cavity stability limit $g = -1$. Above this limit, if g is only slightly greater than -1, small fluctuations in the mirror position and orientation will cause large geometric tilts of the cavity axis and may have a significant effect on the FEL performance.

The effect of mirror tilt has been studied previously for short Rayleigh length 100 kW and 1 MW FEL designs [2]. For the case of no gain, the effects on the optical mode of mirror tilt, transverse and longitudinal mirror shift, and mirror focal length change have been reported [3, 4]. Here we report simulations of our latest compact design, and include, along with mirror tilt θ_m , the effects of mirror shift y_m and of transverse electron beam shift y_e .

Since mirror motions are relatively slow (~ 100 ms) compared with the optical round trip time ($\sim$ ns) the motions are assumed to be fixed over many passes of the optical mode through the cavity. Simulation methods use the self-consistent Maxwell-Lorentz equations in the presence of the electron beam. In order to accommodate the large scale difference between the optical mode at its waist and at the mirror, an expanding coordinate system is utilized [5] which allows the simulation to follow the optical mode all the way to the mirror, even when the cavity length is very long compared with the cavity length, $S \approx 300Z_0$.

The electron beam is characterized by dimensionless

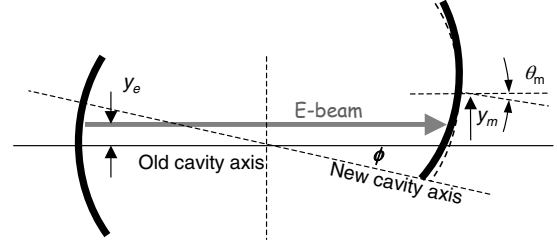


Figure 1: Schematic of the laser cavity. The right mirror is tilted by θ_m and shifted by y_m , which causes the cavity axis to change. The electron beam shift y_e does not change the cavity axis.

current density, radius, angular spread and initial phase velocity; the undulator by its period, length, and undulator parameter K ; and the cavity by its length, mirror shape and size, and energy loss per pass. The cavity mirrors may be adjusted for tilt and transverse shift, and the electron beam may be shifted, as shown in Fig. 1. Both the weak-field gain and energy extraction (defined as the electron beam energy loss per pass divided by the electron beam energy) are reported as a function of the pass number.

The FEL explored has parameters: cavity length $S = 18$ m, Rayleigh range $Z_0 = 6$ cm, optical wavelength $\lambda = 1\mu\text{m}$, and optical power outcoupling/pass 25%. The electron beam energy is 80 MeV, peak beam current $I_{peak} = 400$ A, with bunch charge 0.2 nC. Since $Z_0/S = 0.0033$, this design will be subject to the short Rayleigh length effects described above.

MIRROR TILT

If one mirror of a laser cavity is tilted by angle θ_m , geometric considerations show that a new cavity axis will be defined which tilts with respect to the old axis by amount ϕ , where $\phi = [(S^2 + 4Z_0^2)/(8Z_0^2)]\theta_m$ [4]. For $Z_0 \ll S$, as is the case here, ϕ can become quite large. Figure 2 shows the result of mirror tilt on the weak-field gain, showing that the laser will continue to operate up to $\theta_m \approx 2.6 \mu\text{rad}$ at the laser threshold of 33% gain (corresponding to 25% cavity loss). Figure 2 also shows the extraction as a function of θ_m . If we take half of the peak power as a measure of the useful range of mirror tilt, we see that a tilt $\theta_m \approx 1.4 \mu\text{rad}$ is acceptable. In fact, for both graphs, very little decrease in gain or extraction is evident out to $\theta_m \approx 0.5 \mu\text{rad}$. With active alignment mirrors can currently be held to a design tolerance $\approx 0.1 \mu\text{rad}$, therefore mirror tilt does not appear

* Work supported by JTO, ONR, NAVSEA

[†] ppcrooke@nps.edu

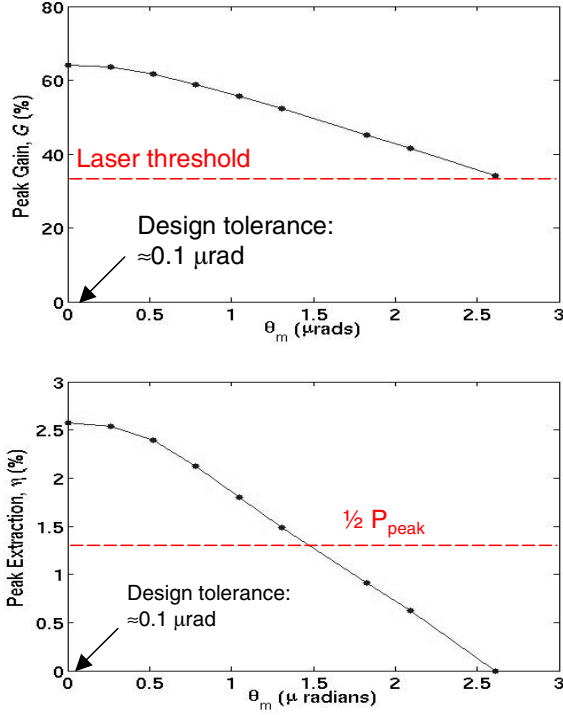


Figure 2: Dependence of weak-field gain and extraction on mirror tilt angle. Lasing continues out to $2.5 \mu\text{rad}$; no appreciable change occurs over the current design tolerance of $\approx 0.1 \mu\text{rad}$.

to be a problem.

Figure 3 shows the optical mode across the undulator for an extreme mirror tilt $\theta_m = 2.2 \mu\text{rad}$. The mode has tilted by 7 mrad with a small amount of distortion; however, the optical mode still encloses the electron beam. Interestingly, the observed tilt is orders of magnitude smaller than the predicted cavity axis tilt ϕ , showing that the on-axis electron beam strongly stabilizes the optical mode.

MIRROR SHIFT

A transverse shift of one cavity mirror by amount y_m will also cause a geometric cavity axis tilt ϕ , where here $\phi = (2S^2/8Z_0^2)y_m$. For our case of $Z_0 \ll S$, a small mirror shift may cause a large axis tilt. Figure 4 shows the gain and extraction for mirror shifts up to the laser threshold at $y_m = 22 \mu\text{m}$. Taking the half-power extraction for an acceptable mirror shift range, the simulation tolerance is $y_m \approx 13 \mu\text{m}$. We have also examined the optical mode for a shift $y_m = 21 \mu\text{m}$ and found a tilt of 0.5 mrad. The appearance of this optical mode is very similar to Fig. 3. Again, the simulation tilt is much less than the predicted cavity axis tilt ϕ , showing that the electron beam is stabilizing the optical mode.

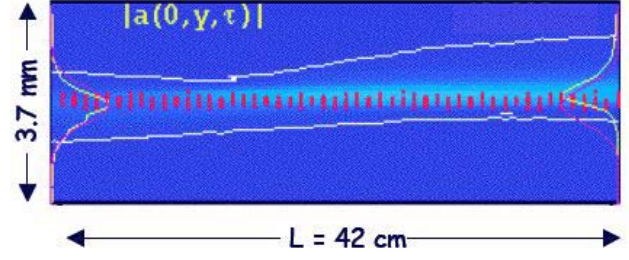


Figure 3: Simulation output showing the optical mode $|a(0, y, z)|$ along the undulator for mirror tilt $2.2 \mu\text{rad}$. The white lines represent 5% or the optical mode peak, the red curves show the untilted initial optical mode profile, the yellow lines are the final optical mode profile, and the vertical red lines show the electron distribution. The optical mode is tilted by 7 mrad, which is much less than the predicted cavity tilt.

ELECTRON BEAM SHIFT

A transverse shift of the electron beam will leave the cavity axis untilted, but the electron beam and optical mode will no longer be aligned. Figure 5 shows the gain and extraction for beam shifts up to 0.9 mm where lasing no longer occurs. Taking the half-power extraction as an acceptable beam shift range, the simulation tolerance is ≈ 0.4

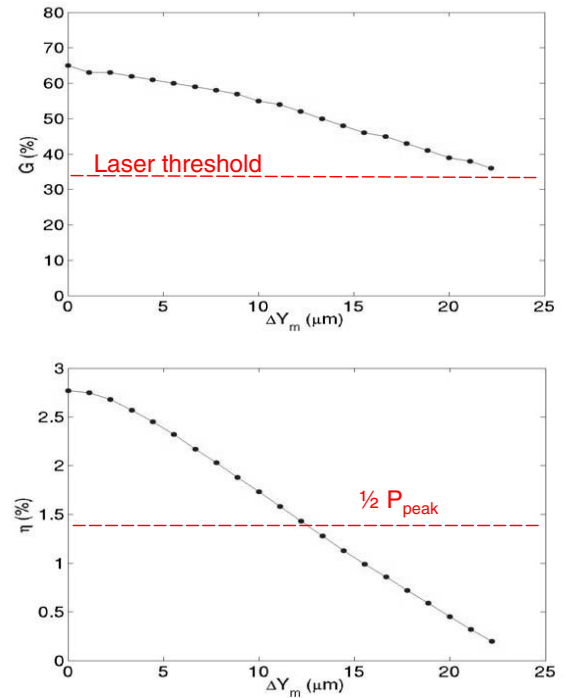


Figure 4: Dependence of weak field gain and extraction on transverse mirror shift. Lasing continues to $22 \mu\text{m}$; no appreciable change occurs out to a few μm .

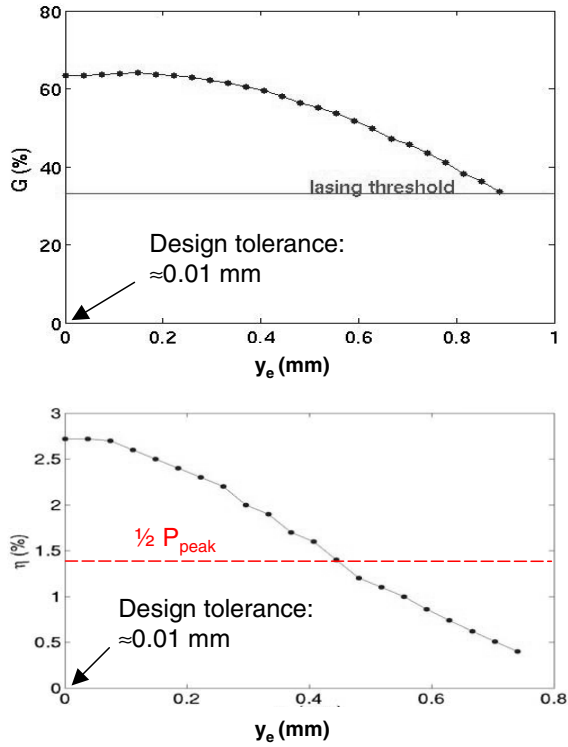


Figure 5: Dependence of weak field gain and extraction on electron beam shift. The half-power tolerance of 0.4 mm is well beyond design tolerance $\approx 10 \mu\text{m}$.

mm, a figure well beyond the current design tolerance of $\approx 10 \mu\text{m}$.

Although the cavity axis remains untilted, examination of optical mode diagrams similar to Fig. 3 shows that the optical mode does tilt, with the downstream side of the optical mode displaced in the same direction as the electron beam offset. [6] We attribute this tilt to the increase in electron bunching and hence the gain near the downstream end of the undulator. For an electron mode shift $y_e = 0.44$ mm, we observe an optical mode tilt of 1.3 mrad. Nevertheless, the optical mode overlaps the electron beam through the undulator.

CONCLUSIONS

The susceptibility of a free electron laser to vibrations – motions of the mirrors and of the electron beam – may be pronounced if the Rayleigh length of the cavity is small. We have investigated the dependence of weak-field gain and extraction on mirror tilt, mirror shift, and electron beam shift for a laser with $Z_0/S = 0.0033$. From our simulations the laser maintains greater than half its power for mirror tilt $< 1.4 \mu\text{rad}$, transverse mirror shift $< 13 \mu\text{m}$, and electron beam shift < 0.4 mm. These tolerances are beyond known design tolerances and should be acceptable. We also observe that mirror tilt and shift tends to rotate

the optical mode, but the rotation is considerably less than the cavity axis tilt predicted from geometric considerations, thereby showing that the electron beam strongly stabilizes the optical mode. In the case of electron beam shift, the optical mode also rotates, but the rotation is caused by asymmetric gain in the undulator rather than by cavity geometry.

REFERENCES

- [1] A.E. Siegman, “Lasers”, (University Science Books, Sausalito, 1986).
- [2] P.P. Crooker, T. Campbell, W. Ossenfort, S. Miller, J. Blau, and W. Colson, “A study of the stability of a high-power free electron laser utilizing a short Rayleigh length”, Nucl. Instr. and Meth. A, 507 (2003) 52-55.
- [3] P.P. Crooker, J. Blau, and W.B. Colson, “Stability of a short Rayleigh range laser resonator with misaligned or distorted mirrors”, FEL2004, (2004), p. 274. <http://www.JACoW.org>.
- [4] P.P. Crooker, J. Blau, and W.B. Colson, “Stability of a short Rayleigh length laser resonator”, Phys. Rev. ST-AB, **8**, 040703 (2005).
- [5] R.L. Armstead, W.B. Colson, and R.J. Blau, “Short Rayleigh length free electron laser simulations in expanding coordinates”, FEL2004, (2004), p. 75. <http://www.JACoW.org>
- [6] W.B. Colson and J.L. Richardson, “Multimode theory of free-electron laser oscillators”, Phys. Rev. Lett. **50**, 1059 (1983).