



Calhoun: The NPS Institutional Archive
DSpace Repository

Faculty and Researchers

Patents

2017-01-03

Electromagnetic device and method to accelerate solid metal slugs to high speeds

Maier, William Bryan; Nolting, Eugene Ellis; Morris, Gene;
Snyder, Donald D.

The United States of America as represented by the Secretary of the Navy,
Washington, DC (US)

<http://hdl.handle.net/10945/51446>

Downloaded from NPS Archive: Calhoun



Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

<http://www.nps.edu/library>



(12) **United States Patent**
Maier et al.

(10) **Patent No.:** **US 9,534,863 B2**
(45) **Date of Patent:** **Jan. 3, 2017**

(54) **ELECTROMAGNETIC DEVICE AND METHOD TO ACCELERATE SOLID METAL SLUGS TO HIGH SPEEDS**

(58) **Field of Classification Search**
USPC 124/3; 89/8, 1.814–1.816; 310/12.01–12.33;
318/135

See application file for complete search history.

(71) Applicant: **The United States of America, as represented by the Secretary of the Navy, Washington, DC (US)**

(56) **References Cited**

U.S. PATENT DOCUMENTS

667,435 A * 2/1901 Friese-Greene et al. 102/375
4,534,263 A 8/1985 Heyne et al.

(Continued)

OTHER PUBLICATIONS

Sivkov, A.A., "Hybrid Electromagnetic System for Acceleration of Solids." Journal of Applied Mechanics and Technical Physics, vol. 42, pp. 1-9, 2001.

Primary Examiner — Stephen M Johnson

Assistant Examiner — Benjamin Gomberg

(74) *Attorney, Agent, or Firm* — Naval Postgraduate School; James B. Potts; Lisa A. Norris

(72) Inventors: **William Bryan Maier**, Marina, CA (US); **Eugene Ellis Nolting**, Columbia, MD (US); **Gene Morris**, Seaside, CA (US); **Donald D. Snyder**, Monterey, CA (US); **George Ralph Caramico**, Virginia Beach, VA (US)

(73) Assignee: **The United States of America, as represented by the Secretary of the Navy, Washington, DC (US)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 217 days.

(21) Appl. No.: **13/662,786**

(57) **ABSTRACT**

(22) Filed: **Oct. 29, 2012**

A device and method to accelerate solid metal slugs to high speeds. In one embodiment, a large electric current is passed through an outer cylindrical metal tube enclosing in part a metal slug, a central electrode, and a conducting tail coupled at opposite ends to the metal slug and the central electrode. Electromagnetic forces accelerate the metal slug to a point high enough to mechanically separate the conducting tail. On separation, a plasma is generated by the passage of electric current through a gas produced by vaporization of the conducting tail and nearby materials. An insulator enclosed within the tube prevents the plasma from shorting to the outer tube until the current flow has produced a sufficient magnetic field to contain the plasma. The metal slug is then accelerated to high speed by a combination of electromagnetic forces and mechanical pressure from the hot gas through which the electric current is passing.

(65) **Prior Publication Data**

US 2016/0054093 A1 Feb. 25, 2016


Related U.S. Application Data

(60) Provisional application No. 61/554,367, filed on Nov. 1, 2011.

(51) **Int. Cl.**
F41B 6/00 (2006.01)
F42B 6/00 (2006.01)

(52) **U.S. Cl.**
CPC **F41B 6/006** (2013.01); **F41B 6/00** (2013.01); **F42B 6/006** (2013.01)

10 Claims, 3 Drawing Sheets

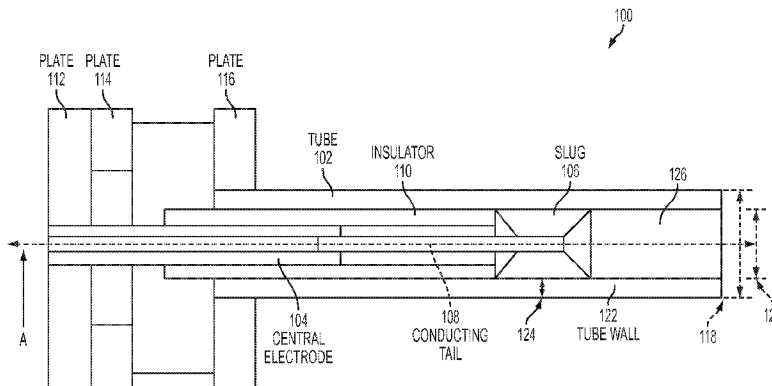

(56)

References Cited

U.S. PATENT DOCUMENTS

4,715,261	A *	12/1987	Goldstein et al.	89/8
4,913,029	A *	4/1990	Tidman et al.	89/8
4,967,637	A	11/1990	Loffler et al.	
5,005,484	A *	4/1991	Witt	102/501
5,042,359	A *	8/1991	Witt et al.	89/8
5,094,141	A *	3/1992	Zwingel et al.	89/8
5,115,743	A	5/1992	Loffler	
5,171,932	A	12/1992	McElroy	
5,331,879	A *	7/1994	Loffler	89/8
5,503,058	A	4/1996	Marinos	
5,503,081	A	4/1996	Lindblom et al.	
5,546,844	A	8/1996	Krumm et al.	
5,612,506	A *	3/1997	Goldstein	102/472
5,688,416	A	11/1997	Johnson	
5,854,439	A	12/1998	Almstrom et al.	
6,119,599	A	9/2000	Johnson et al.	
8,746,120	B1	6/2014	Nolting et al.	
8,810,121	B1	8/2014	Maier, II et al.	

* cited by examiner

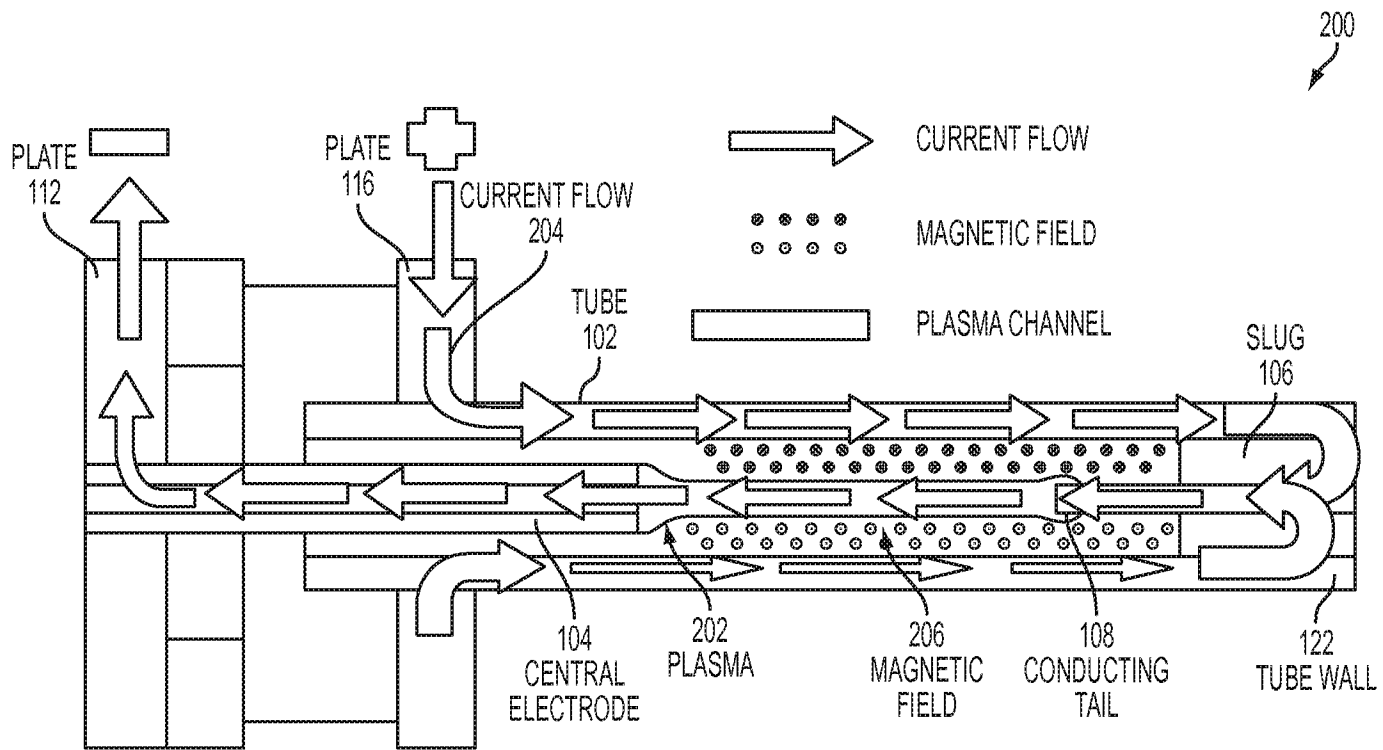


FIG. 2

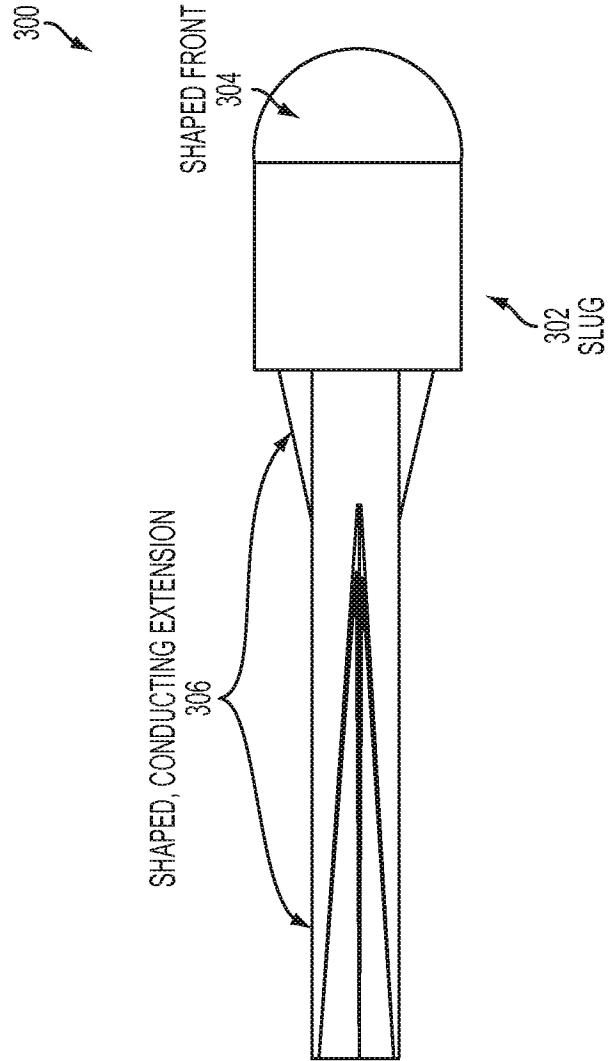


FIG. 3

1

ELECTROMAGNETIC DEVICE AND METHOD TO ACCELERATE SOLID METAL SLUGS TO HIGH SPEEDS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 61/554,367 filed Nov. 1, 2011, which is hereby incorporated in its entirety by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to electromagnetic acceleration of metal projectiles.

2. Description of the Related Art

High velocity metal slugs have a variety of uses, but rather large and complicated facilities, e.g. staged gas guns, are required to produce speeds of over about 1 km/s. Chemical propellants ignite and produce a high pressure gas that pushes metal slugs out of gun barrels. The speed that can be achieved is limited by the speed of sound in the combustion products, which may reach a few thousand degrees Kelvin (K). Speeds nearing 1.2 km/s have been achieved in some prior art systems but are not normally reached. Prior art railguns routinely accelerated projectiles to speeds greater than 1.2 km/s; however, railgun barrel construction is complicated and expensive, and the barrel lifetime is limited. In prior art railgun systems, immense forces push the rails apart, and very strong containment is required; insulators are utilized to separate the conducting rails, and large power supplies are required.

SUMMARY OF THE INVENTION

Embodiments in accordance with the invention described herein accelerate solid metal slugs to high speeds using a combination of electromagnetic forces and gas pressure. In accordance with one embodiment, a tubular electromagnetic (EM) launcher device includes: a cylindrical metal tube having an outer diameter and an inner diameter and a central channel; a metal slug disposed within the central channel; a conducting central electrode disposed within the central channel; a conducting tail where a first portion of the conducting tail is attached within the metal slug, a second portion of the conducting tail extends between the metal slug and the central electrode, and a third portion of the conducting tail extends within the central electrode; an insulator disposed within the central channel and surrounding at least a portion of the conducting central electrode and the second portion of the conducting tail; a first conductive plate in conductive contact with the central electrode; and a second conductive plate in conductive contact with the metal tube, wherein application of a current to the metal tube through the second conductive plate to the device causes the conducting tail to break with resultant generation of a plasma along a central axis of the central channel and generation of gas pressure and electromagnetic forces that accelerates the metal slug to a high speed.

In another embodiment, a method for accelerating a solid metal slug to a high speed by the device is also described.

Embodiments in accordance with the invention are best understood by reference to the following detailed description when read in conjunction with the accompanying drawings.

2

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a cross-sectional view of a schematic configuration of a tubular electromagnetic (EM) launcher device in accordance with one embodiment.

FIG. 2 illustrates a schematic depiction of a current flow in the tubular EM launcher device of FIG. 1 when a plasma is fully developed in accordance with one embodiment.

FIG. 3 illustrates a schematic depiction of a shaped conducting extension added to a metal slug in accordance with one embodiment.

Embodiments in accordance with the invention are further described herein with reference to the drawings.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 illustrates a cross-sectional view of a schematic configuration of a tubular electromagnetic (EM) launcher device **100** in accordance with one embodiment. As illustrated in FIG. 1, tubular EM launcher **100** includes: a smooth cylindrical metal tube **102**; a conducting central electrode **104**; a conductive slug **106**; a metallic conducting tail **108** that initially makes conductive contact between slug **106** and central electrode **104**; a central insulator **110**, and conducting plates **112**, **114**, and **116**. Not shown are current carrying attachments which couple device **100** to a power supply capable of supplying current, such as several hundred kilo-amperes of current. The power supply (not shown) is connected to the current carrying attachments and when initiated, provides power to device **100** via the current carry attachments. In one embodiment, a current carry attachments are connected at plates **112**, **116** such that current flows from the power supply to device **100** at plate **116** and exits at plate **112**.

Tube **102** has an exterior diameter **118** and interior diameter **120** resulting in a tube wall **122** with a wall thickness **124** and an interior channel **126** of diameter **120** having a central axis shown as A. In one embodiment tube **102** is formed of one or more metals. The metal selected should be strong enough to withstand large pressures produced within channel **126**. Disposed within interior channel **126** is metal slug **106** which surrounds and is attached to conducting tail **108**. In one embodiment, conducting tail **108** is formed of a conductive material.

In one embodiment a first portion of conducting tail **108** is seated in slug **106** and the remainder of conducting tail **108** extends from slug **106** through insulator **110** and partially into central electrode **104**. In various embodiments, the shape of conducting tail **108** and slug **106** can be differently configured. Further insulator **110**, can be differently configured, such that in some embodiments, insulator **110** can be deleted or cover part or all of interior channel **126**. In some embodiments, insulator **110** can be differently shaped.

FIG. 2 illustrates a schematic depiction **200** of a current flow **204** in tubular EM launcher device **100** of FIG. 1 when a plasma **202** is fully developed in accordance with one embodiment. For clarity of description identifiers utilized in FIG. 1 are maintained in FIG. 2. In FIG. 2, application of current is from an external power supply (not shown) through current carrying attachments (not shown) coupled to device **100**. For example, in one embodiment, current enters device **100** at plate **116**, flows through device **100**, and exits at plate **112**. In one embodiment, when power is applied to tubular EM launcher device **100**, electrical current flows from the power supply (not shown) via the electrical connectors (not shown) down the length of tube **102** to the

3

position of slug **106**, e.g. a projectile, through slug **106**, back down a conducting path through the center of tube **102** to central electrode **104**, and then back to the power supply (not shown). In some embodiments, the current flow in slug **106** is across back side of slug **106**, e.g., the back side being the side of slug **106** facing central electrode **104**.

When a voltage is applied to plates **112** and **116**, a large current **204** flows, and slug **106** is accelerated by a force $F=L'I^2/2$, where I is the current and L' is a constant called the linear inductance gradient. The acceleration is large enough to mechanically separate conducting tail **108** and a very hot plasma arc, plasma **202**, is formed between the two separated halves of conducting tail **108**. Plasma **202** is generated by the passage of electric current through the gas produced by vaporization of the material of conducting tail **108** and nearby materials. The hot plasma arc, plasma **202**, evaporates material of conducting tail **108** and produces a gas pressure that can be in excess of 20,000 psi. Further acceleration of slug **106** is accomplished by a combination of gas pressure and electromagnetic forces. In testing, slug speeds >1400 m/s have been produced by ≈ 20 cm of travel, i.e., with acceleration of slug **106** along a short cylindrical tube **102**.

The current passing through plasma **202** produces an axial magnetic field **206**. Axial magnetic field **206** encircles, e.g., surrounds, plasma **202** and inhibits flow to tube **102** resulting in plasma **202** formed as a plasma channel, e.g. a column, along the central axis of tube **102**. Magnetic field **206** generated by the central current holds plasma **202** away from wall **122** of tube **102** and prevents plasma **202** from shorting to the side. Central insulator **110** prevents the initial stage of plasma **202** from shorting to wall **122** of tube **102** before a strong magnetic field is established.

The performance of device **100** is very sensitive to changes in the material and sizing of central electrode **104**, conducting tail **106**, insulator **110**, and metal slug **106**. In one embodiment, one or more conducting extensions can be added to slug **106** to alter performance characteristics as further illustrated with reference to FIG. **3**.

FIG. **3** illustrates a schematic depiction of a shaped conducting extension added to a slug in accordance with one embodiment. As illustrated in FIG. **3**, a metal slug **302** is configured to include a rounded shaped front **304** and a shaped conducting extension **306**.

As described above, embodiments in accordance with the invention described herein accelerate solid metal slugs to high speeds using a combination of electromagnetic forces and gas pressure. This disclosure provides exemplary embodiments of the present invention. The scope of the present invention is not limited by these exemplary embodiments. Numerous variations, whether explicitly provided for by the specification or implied by the specification or not, may be implemented by one of skill in the art in view of this disclosure.

What is claimed is:

1. A tubular electromagnetic (EM) launcher device for accelerating solid metal slugs to high speeds comprising:

- a cylindrical metal tube having an outer diameter and an inner diameter and having a tube wall between said outer diameter and said inner diameter, where said tube wall surrounds a central channel having a central axis;
- a metal slug disposed within said central channel and in conductive contact with said tube wall, where said central axis of said central channel intersects said metal slug;

4

a central electrode disposed within said central channel where said central electrode is displaced from said tube wall;

a conducting tail where said conducting tail is displaced from said tube wall, where a first portion of said conducting tail is attached within said metal slug and in conductive contact with said metal slug, a second portion of said conducting tail extends between said metal slug and said central electrode, and a third portion of said conducting tail extends within said central electrode and is in conductive contact with said central electrode, and where said central axis of said central channel intersects said first portion of said conducting tail, said second portion of said conducting tail, and said third portion of said conducting tail;

a first conductive plate in conductive contact with said central electrode; and,

a second conductive plate in conductive contact with said cylindrical metal tube,

wherein application of a current to said metal tube through said second conductive plate results in said current passing through said cylindrical metal tube, through said metal slug, through said conducting tail, and through said central electrode causing said conducting tail to break with resultant generation of a plasma along said central axis of said central channel and generation of gas pressure,

and further wherein said current passes through said plasma producing an axial magnetic field which encircles said plasma and inhibits flow of said plasma said cylindrical metal tube resulting in said plasma formed as a plasma channel displaced from said tube wall;

and further wherein said current passes through said plasma producing an electromagnetic force wherein said gas pressure and said electromagnetic force accelerate said metal slug to a high speed greater than or equal to 1000 m/s.

2. The tubular electromagnetic (EM) launcher device of claim **1** wherein said metal slug further comprises: one or more conducting extensions.

3. The tubular electromagnetic (EM) launcher of claim **1** where some portion of said central electrode surrounds a portion of said central axis, and where said third portion of said conducting tail is in conductive contact with said central electrode at said some portion of said central electrode.

4. The tubular electromagnetic (EM) launcher of claim **3** further comprising an insulator disposed within said central channel where said insulator surrounds said portion of said central axis and separates said tube wall and said some portion of said conducting central electrode.

5. The tubular electromagnetic (EM) launcher of claim **1** further comprising said current passing through said cylindrical metal tube, through said metal slug, through said conducting tail, and through said conducting central electrode, wherein said current causes said metal slug to accelerate and the acceleration of said metal slug causes said conducting tail to break.

6. The tubular electromagnetic (EM) launcher of claim **5** where said current causes said metal slug to accelerate and the acceleration of said metal slug causes said conducting tail to break into a first half attached within said metal slug and a second half in conductive contact with said conducting central electrode, and said current causes a plasma arc to form between said first half and said second half.

7. A method for accelerating solid metal slugs to high speeds in a device comprising:

5

a cylindrical metal tube having an outer diameter and an inner diameter and having a tube wall between said outer diameter and said inner diameter, where said tube wall surrounds a central channel having a central axis;

a metal slug disposed within said central channel and in conductive contact with said tube wall, where said central axis of said central channel intersects said metal slug;

a central electrode disposed within said central channel where said central electrode is displaced from said tube wall;

a conducting tail where said conducting tail is displaced from said tube wall, where a first portion of said conducting tail is attached within said metal slug and in conductive contact with said metal slug, a second portion of said conducting tail extends between said metal slug and said central electrode, and a third portion of said conducting tail extends within said central electrode and is in conductive contact with said central electrode, and where said central axis of said central channel intersects said first portion of said conducting tail, said second portion of said conducting tail, and said third portion of said conducting tail;

a first conductive plate in conductive contact with said central electrode;

a second conductive plate in conductive contact with said cylindrical metal tube, said method comprising:

applying a current to said cylindrical metal tube through said second conductive plate resulting in said current passing through said metal tube, through said metal slug, through said conducting tail, and through said central electrode causing said conducting tail to break with resultant generation of a plasma along said central axis of said central channel and generation of gas pressure,

passing said current through said plasma producing an axial magnetic field which encircles said plasma and inhibits flow of said plasma to said cylindrical metal tube resulting in said plasma formed as a plasma channel separated from said tube wall;

and further wherein said current passes through said plasma producing an electromagnetic force wherein said gas pressure and said electromagnetic force accelerate said metal slug to a high speed greater than or equal to 1000 m/s.

8. The method of claim 7 where the causing of said conductive tail to break comprises accelerating said metal slug sufficiently to mechanically separate said conducting tail and causing said conducting tail to break into a first half attached within said metal slug and a second half in conductive contact with said conducting central electrode, and where the resultant generation of said plasma comprises forming a plasma between said first half attached within said metal slug and said second half in conductive contact with said conducting central electrode.

6

9. A system for accelerating solid metal slugs to high speeds comprising:

a cylindrical metal tube having an outer diameter and an inner diameter and having a tube wall between said outer diameter and said inner diameter, where said tube wall surrounds a central channel having a central axis;

a metal slug disposed within said central channel and in conductive contact with said tube wall, where said central axis of said central channel intersects said metal slug;

a conducting central electrode disposed within said central channel where said conducting central electrode is displaced from said tube wall and where some portion of said conducting central electrode surrounds a portion of said central axis, and where said conducting central electrode is disposed within said central channel such that said tube wall surrounds said some portion of said conducting central electrode;

a single conducting tail where said single conducting tail is displaced from said tube wall, and where a first portion of said conducting tail is attached within said metal slug and is in conductive contact with said metal slug, a second portion of said conducting tail extends between said metal slug and said central electrode, and a third portion of said conducting tail extends within said central electrode and in conductive contact with said some portion of said conducting central electrode surrounding said portion of said central axis, and where said central axis of said central channel intersects said first portion of said conducting tail, said second portion of said conducting tail, and said third portion of said conducting tail; and

a first conductive plate in conductive contact with said conducting central electrode; a second conductive plate in conductive contact with said cylindrical metal tube; wherein passing a current through said cylindrical metal tube, through said metal slug, through said conducting tail, and through said central electrode, causes said metal slug to accelerate and the acceleration of said metal slug causing said conducting tail to break into a first half attached within said metal slug and a second half in conductive contact with said conducting central electrode, and said current causing a plasma arc to form between said first half and said second half and along said central axis of said central channel, and said current passing through said plasma arc producing an axial magnetic field which encircles said plasma and inhibits flow of said plasma arc to said cylindrical metal tube resulting in said plasma arc formed as a plasma channel separated from said tube wall.

10. The system of claim 9 further comprising an insulator disposed within said central channel and surrounding a segment of said central axis, and said insulator separating said central electrode and said tube wall.

* * * * *