



Calhoun: The NPS Institutional Archive
DSpace Repository

CRUSER (Consortium for Robotics and Unmanned Systems Education and Research) Collection

2016

Low-Cost High Precision Aerial Delivery System (LC-ADS)

Dobrokhodov, Vladimir

Monterey, California: Naval Postgraduate School

<http://hdl.handle.net/10945/57050>

Downloaded from NPS Archive: Calhoun



Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943



<http://www.nps.edu/library>

Low-Cost High Precision Aerial Delivery System (LC-ADS)



Naval
Postgraduate
School

DZ – drop zone
CARP – Computed Air Release Point

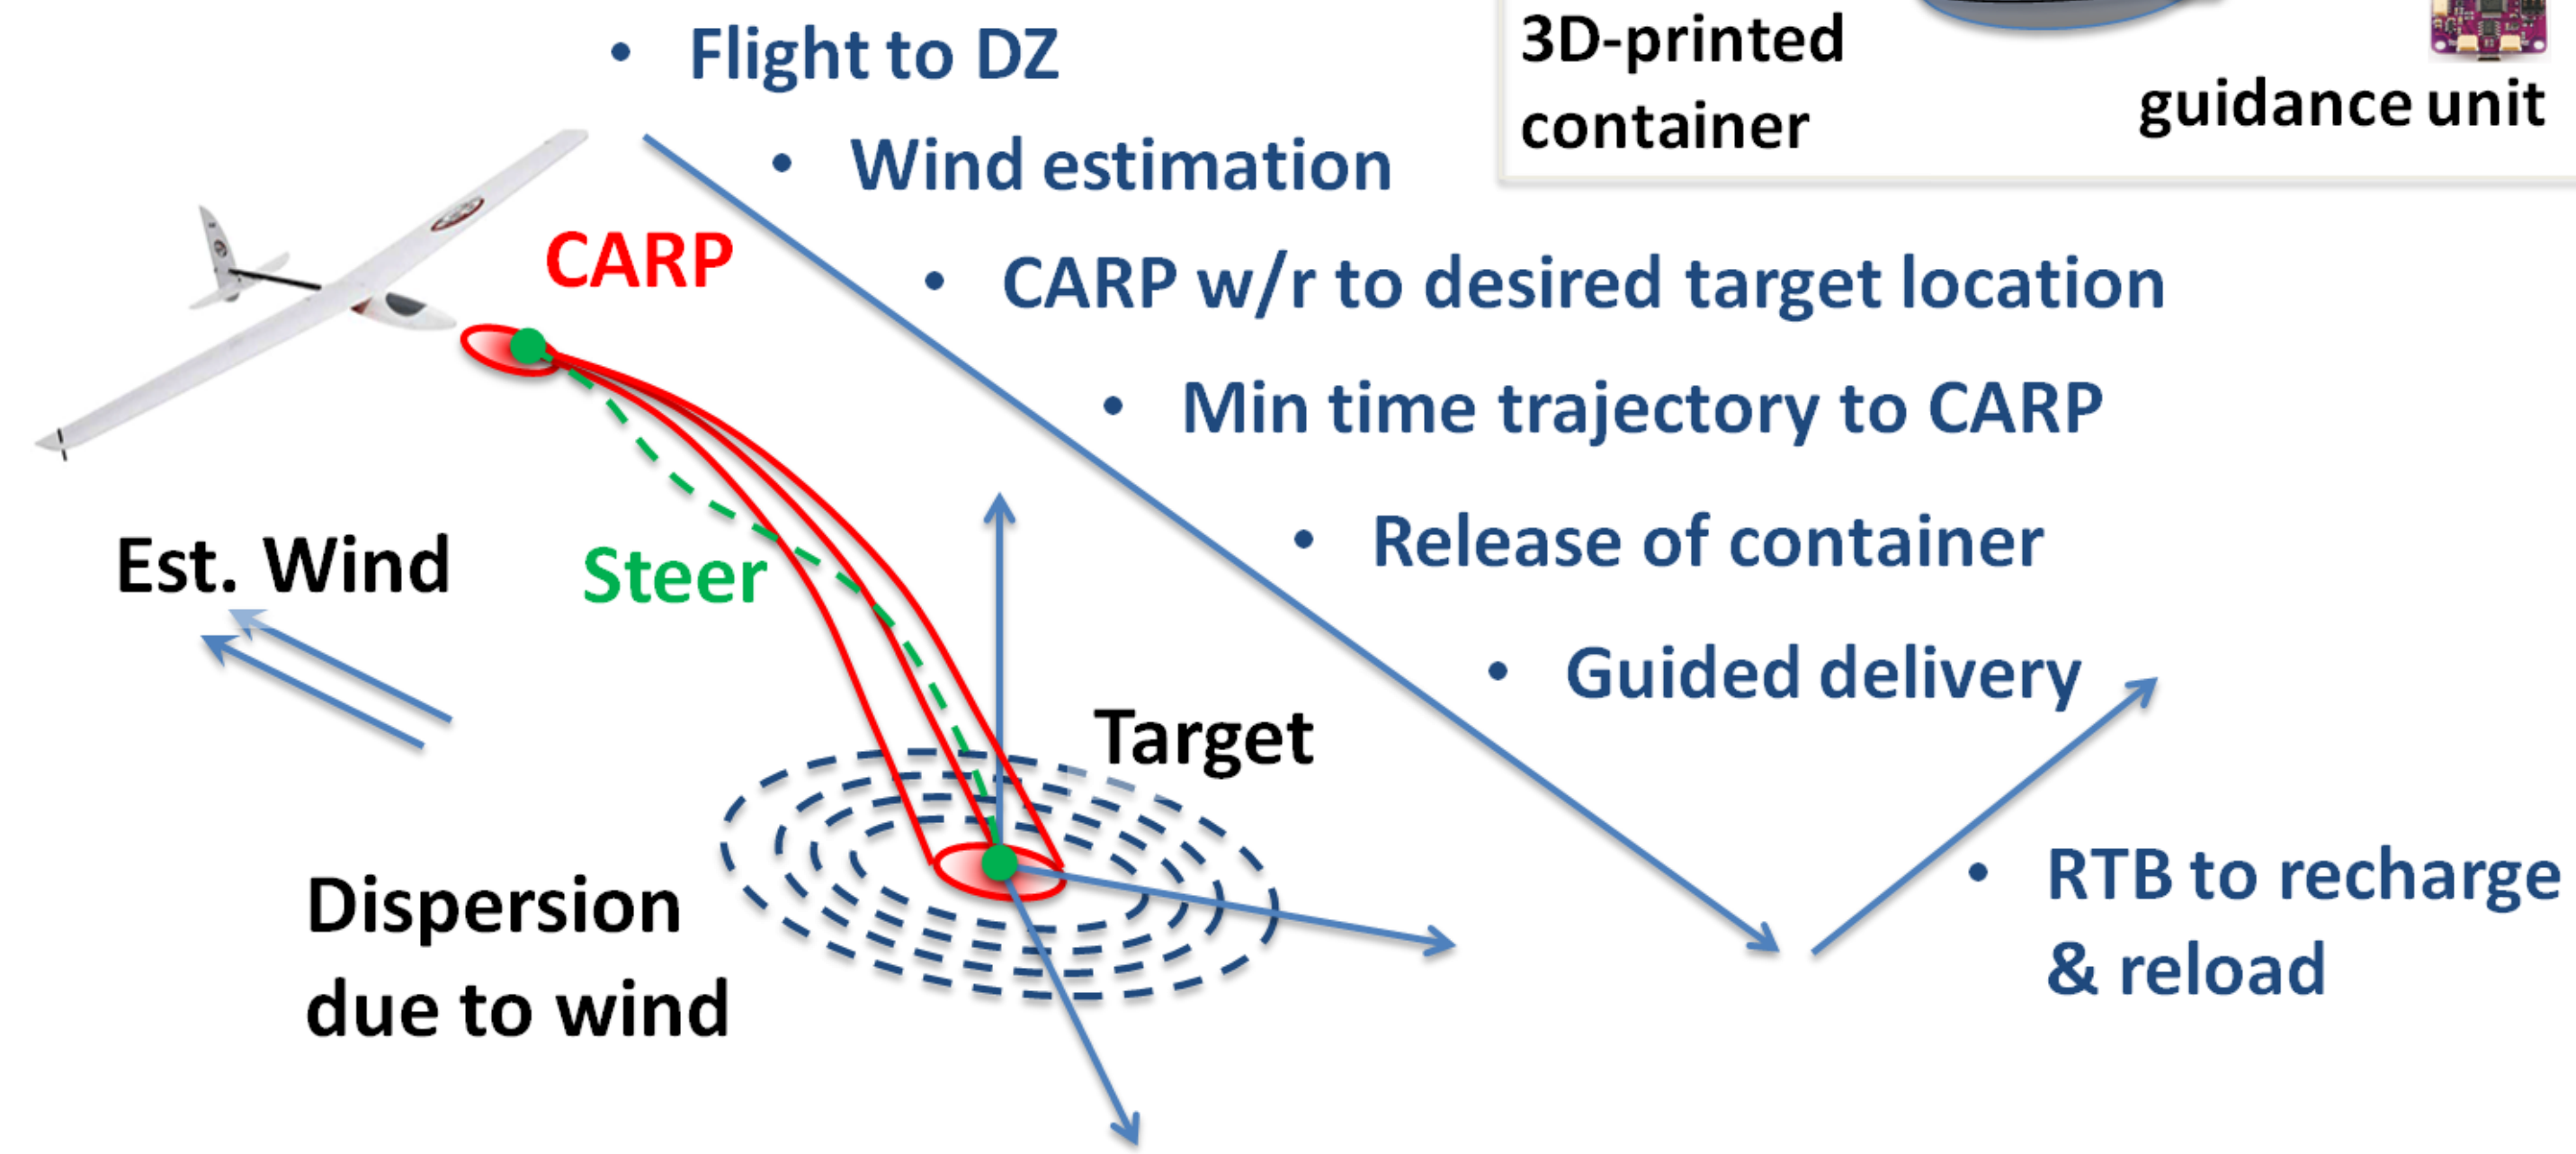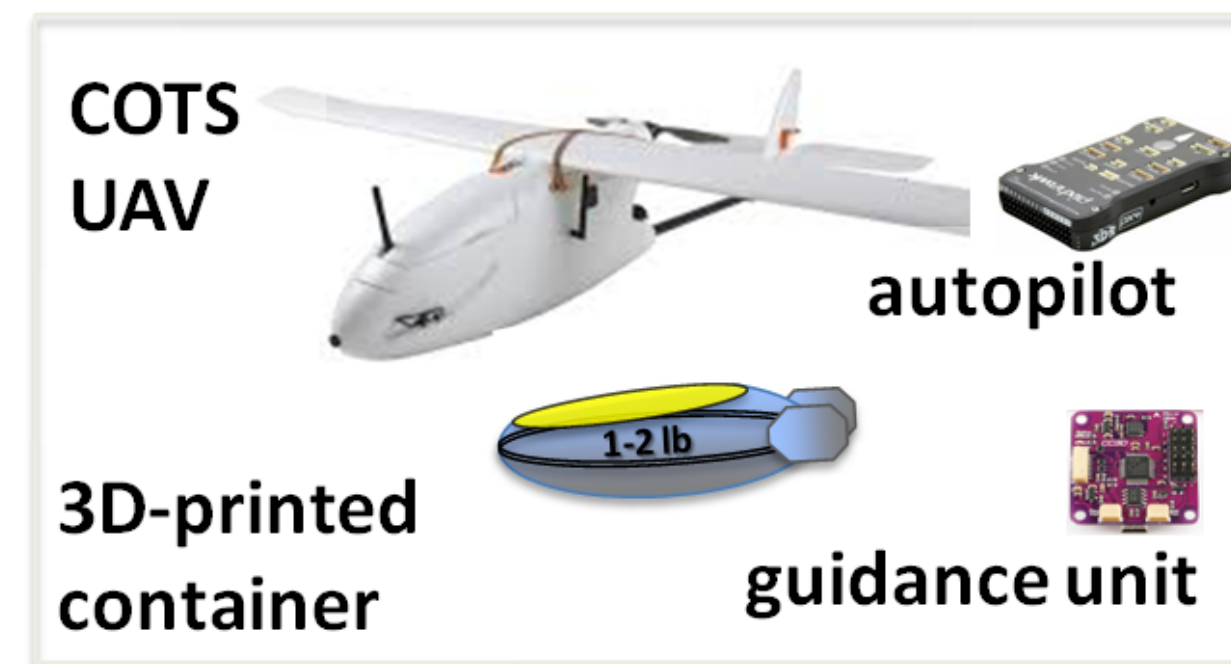

Objectives

- Enable autonomous precision delivery of 1–2 lb payloads from a low-cost small UAV. Two delivery schemes will be evaluated: 1). using a dropped store with controlled glide, and 2). using a remote landing/launch procedure to support 2-way delivery.
- Guarantee robustness of the UAV in the presence of significant variation of wind conditions (~50%) and change of weight (~25%).

Background

- Operational Aerial Delivery Systems (e.g. C-17, C-130) require expensive instrumentation, manning power, ground and aircrew operational support, and significant preparation time with logistics tail.
- Presence of human pilots and payload crew results in high altitude and large offset distances. Despite recent advances of ADS systems, major drawbacks remain a high cost per pound of payload delivered, significant preparation time, and high probability of loss.

Technical Approach

- Develop two schemes for the precision delivery of small payloads to remote areas:
 - Using a released, guided store to deliver payloads where remote landings are either not possible or not desired.
 - Develop a remote landing and relaunch scheme that allows the UAS to autonomously land at a remote location, and then be autonomously relaunched after the payload has been delivered and/or replaced.
- To achieve this the UAS will need to:
 - Estimate local wind, use stored DTED data to predict the optimal release point (CARP) or landing profile.
 - Automatically generate end solution for the payload release and/or landing.
- Released payloads will optionally steer to the desired target.

Motivation

- Expedited delivery of high value supplies, packaged in a small, expendable delivery container, can be critical for the survival of people in remote areas.
- Use of a low-cost, expendable UAS for these missions removes human operators from harms way.
- The remote landing/launch scheme allows for two-way delivery of payloads.
- The proposed system is cheap and scalable so that multiple cooperative UAVs can deliver packages to remote denied areas.
- Operational impact of the system is high with very low cost and manning footprint that would be required to support its operation.
- An IFC for the proposed asset is currently in progress for other projects.