

Calhoun: The NPS Institutional Archive

DSpace Repository

Reports and Technical Reports

All Technical Reports Collection

2023-03

ARCEX23 Cryophone Experiment

Wheeler, Stephen K.; Reeder, D. Benjamin; Joseph, John

Monterey, California. Naval Postgraduate School

https://hdl.handle.net/10945/72303

This publication is a work of the U.S. Government as defined in Title 17, United States Code, Section 101. Copyright protection is not available for this work in the United States.

Downloaded from NPS Archive: Calhoun



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

> Dudley Knox Library / Naval Postgraduate School 411 Dyer Road / 1 University Circle Monterey, California USA 93943

http://www.nps.edu/library



NAVAL POSTGRADUATE SCHOOL

MONTEREY, CALIFORNIA

ARCEX23 CRYOPHONE EXPERIMENT


by

Wheeler, Stephen K.; Reeder, D. Benjamin; Joseph, John

March 2023

Distribution Statement A: Approved for public release. Distribution is unlimited.

Prepared for: The Office of Naval Research, Code 32



	RI	EPORT DOCUMENTA	TION PA	GE		
PLEASE DO NOT RETURN	YOUR FORM TO THE AB	OVE ORGANIZATION.				
1. REPORT DATE	2. REPORT TYPE		3.	. DATES CO	OVERED	
11-MAY-2023	Technical Report		_	START DATE Mar 2023		END DATE May 2023
4. TITLE AND SUBTITLE ARCEX23 Cryophone Experi	ment		<u> </u>			
5a. CONTRACT NUMBER	5	b. GRANT NUMBER		5c. PR	OGRAM ELEM	ENT NUMBER
5d. PROJECT NUMBER	56	e. TASK NUMBER		5f. WORK UNIT NUMBER		BER
6. AUTHOR(S)						
Stephen K.Wheeler, Benjamii	n Reeder, John Joseph					
7. PERFORMING ORGANIZA Naval Postgraduate School		DRESS(ES)				PRMING ORGANIZATION NUMBER
1 University Circle Monterey, CA 93943					NPS-OC-	23-001
9. SPONSORING/MONITOR Office of Naval Research (C One Liberty Center 875 N. Randolph Street, Sui Arlington, Va. 22203	ode 32)	ND ADDRESS(ES)	A). SPONSOI CRONYM(S NR	R/MONITOR'S)	11. SPONSOR/MONITOR'S REPORT NUMBER(S)
13. SUPPLEMENTARY NOTE	Approved for public relea	se. Distribution is unlimited.	ct the official	policy or p	osition of the I	Department of Defense or
during March 5-9 on Lake Co acoustical data were collect equipment used by the Nava	olleen in Prudhoe Bay an ed with a focus on acous al Postgraduate School (I	eriment was funded by ONR Co d on first year sea ice 180 nm no tical wave propagation through NPS) during the study and detail iding 360 degrees of detection.	orth oḟ Prudh three media (Is initial findir	oe Bay duri (water, ice, ngs. The ini	ing Marcń 10-1 and air). This i tial findings si	1. Both environmental and report documents the uggest cryophones can be
15. SUBJECT TERMS Ocean Acoustics, Arctic se	a ice, Cryophone					
16. SECURITY CLASSIFICA	ATION OF:		17. LIMITAT	TION OF AB	STRACT	18. NUMBER OF PAGES
a. REPORT U b. ABSTRACT U C. THIS PAGE U		บบ	UU 37		37	
19a. NAME OF RESPONSIB Stephen Wheeler	LE PERSON		1		. PHONE NUM -796-0325	BER (Include area code)

NAVAL POSTGRADUATE SCHOOL Monterey, California 93943-5000

Ann E. Rondeau	Scott Gartner		
President	Provost		
The report entitled "ARCEX23 Cryophone Exp Naval Research, Battlespace Environments Div	•		
Further distribution of all or part of this rep	oort is authorized.		
This report was prepared by:			
Stephen K. Wheeler	D. Benjamin Reeder		
Student, Meteorology and Oceanography Naval Postgraduate School	Associate Professor, Research Naval Postgraduate School		
John Joseph			
Faculty Associate, Research Naval Postgraduate School			
Reviewed by:	Released by:		
Deter Chy Chairman	Kevin B. Smith		
Peter Chu, Chairman Department of Oceanography	Vice Provost for Research		
Department of Oceanography	vice Provost for Research		

ABSTRACT

The Arctic Exercise 2023 (ARCEX23) Cryophone Experiment was funded by ONR Code 32 (Battlespace Environments). The experiment was conducted during March 5-9 on Lake Colleen in Prudhoe Bay and on first year sea ice 180 nm north of Prudhoe Bay during March 10-11. Both environmental and acoustical data were collected with a focus on acoustical wave propagation through three media (water, ice, and air). This report documents the equipment used by the Naval Postgraduate School (NPS) during the study and details initial findings. The initial findings suggest cryophones can be used to detect signals below and above the ice, providing 360 degrees of detection. Final results will be published in future peer-reviewed scientific journals.

TABLE OF CONTENTS

I. I	NTRODUCTION	
A.	OVERVIEW OF THE EXPE	RIMENT 1
II. I	ENVIRONMENT	3
Α.	AREAS OF STUDY DESCRI	PTION 3
		6
Α.	CRYOPHONE	ERROR! BOOKMARK NOT DEFINED.
В.		ERROR! BOOKMARK NOT DEFINED.
C.	VLA AND CTD	ERROR! BOOKMARK NOT DEFINED.
IV.	EXPERIMENT	
V.	LESSONS LEARNED	
ACK	NOWLEDGEMENTS	
LIST	OF REFERENCES	20
INIT	IAL DISTRIBUTION LIST	22

LIST OF FIGURES

Figure 1: Google Image of Lake Colleen	4
Figure 2: Location of sea ice floe	5
Figure 3: Twin Otter aircraft utlized to fly to sea ice floe	5
Figure 4: Cryophone frozen in ice on Lake Colleen	6
Figure 5: Cryophone and external battery capsule frozen in ice on Lake Colleen	7
Figure 6: Dayton "TST" sound source	8
Figure 7: March 10 th sea ice floe experiment set up	12
Figure 8: March 10 th Ball Drops Waveform and Spectrogram	12
Figure 9: Lightbulb Implosion heard from Cryophone 3 Waveform and Spectrogram	13
Figure 10: Royal Canadian Air Force flyover as heard from SoundTrap	13

LIST OF TABLES

Table 1 Equipment list in each cryophone and Source	9
Table 2 Hydrophone and CTD Equipment	
Table 3 Table 3 Field log	
Table 4 Lessons Learned	

I. INTRODUCTION

A. OVERVIEW OF THE EXPERIMENT

During Arctic Exercise 2023 (ARCEX23), NPS conducted a Cryophone field experiment funded by ONR Code 32 (Battlespace Environments). The experiment focused on expounding upon studies performed in the 1990's that utilized geophones alongside hammer drops to determine wave propagation in sea ice (Stein et al., 1998; Xie & Farmer, 1994). The cryophone experiment sought to expand upon these past studies, and run tests on both freshwater ice and sea ice. This study was carried out in two experimental areas. The first was on Lake Colleen, which lies within Deadhorse, Alaska directly west of the Aurora Hotel. The second area was on a sea ice floe approximately 180 nm northeast of Deadhorse airport. Lake Colleen, a freshwater lake, was determined to be nearly frozen through with about a couple feet of water at the bottom. The freshwater ice provided unique acoustical properties in comparison to sea ice. The primary pieces of equipment utilized at both sites were three NPS cryophones, each consisting of an H4N Zoom recorder, three pre-amps (PCB Piezotronics), and a threechannel accelerometer (PCB). The cryophones were frozen into the surface of the ice at strategic locations where they recorded sounds produced by the acoustic sources. Sound sources used at both sites were a ten-pound metal ball that generated an impulsive broadband signal and a coherent sound source, (the "Tactile Sound Transducer" (TST)) that generated a linear frequency modulated (LFM) chirp signal. Other equipment utilized on the sea ice floe included a conductivity, temperature and depth (CTD) sensor to obtain a sound speed profile, two acoustic record recorders (SoundTrap ST300s) on a vertical line array (VLA), light bulbs used as imploding sound sources at depth, and a ten-inch auger to drill all the necessary holes in the ice.

II. ENVIRONMENT

A. AREAS OF STUDY DESCRIPTION

The study of sound propagation through ice is a niche and little-researched realm of acoustical studies in both fresh and saltwater ice. The environments investigated in the study were chosen to further characterize both media. The first site was Lake Colleen, a rather large freshwater lake that is ~1.8 km long and 1.6 km wide located in Prudhoe Bay near Deadhorse airport. The second site was a sea ice floe in the Beaufort Sea located ~180 nm northeast of Deadhorse, comprised of a large area of first-year ice surrounded by thicker multiyear ice.

Lake Colleen was situated directly west of the Aurora Hotel where the team stayed and bordered by the Deadhorse airport to the South, industrial sites to the Northwest and Northeast, and roads all the way around (Fig. 1).

The sea ice floe was identified by United States National Ice Center (NIC) analysts who worked deftly with aircraft pilots to locate an ideal ice floe for this experiment (Fig. 2). The ice floe was ideal in that it was comprised of multiyear ice and first-year ice with a sufficiently large, flat expanse to land Twin Otter aircraft. Besides the NPS research team, there were several other research teams performing their own unique studies. Due to the flatness and ease with which snow could be cleared to gain access to the ice surface, the experiment was tested alongside the runway. Two Twin Otter aircraft were utilized to fly to the sea ice, one operated by the Royal Canadian Air Force (RCAF) and the other operated by Ken Borek Air (Fig. 3). The first-year ice section of the ice floe was roughly two meters thick and 1.5 km by 1.5 km.



Figure 1: Google Earth image of Lake Colleen, the site for all freshwater ice experiments. Aurora Hotel, Deadhorse airport, and two industrial sites are located east, south, northeast and northwest, respectively.

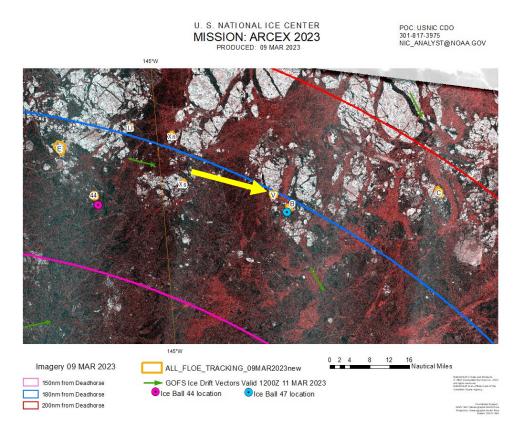


Figure 2: Location of sea ice floe on which the experiment was conducted, indicated by the arrow and letter "V". The ice floe was located \sim 180 nm northeast of Deadhorse airport.



Figure 3: Twin Otter aircraft flown by the Royal Canadian Air Force (background) and Kenn Borek Air (foregroud) on the sea ice at ice floe V.

III. EQUIPMENT

A. CRYOPHONE

The cryophone was first developed during Ice Exercise 2020 (ICEX20) and improved upon for this experiment. Within the cryophones were three primary pieces of equipment: a PCB triaxial accelerometer, three PCB pre-amps, and a Zoom H4N recorder. (Fig. 4) The accelerometer was attached to a metal plate at the bottom of the cryophone, allowing better coupling to the ice. While each piece of equipment held internal batteries, a couple of external battery options were engineered to further withstand the test of time in cold temperatures. The first was an entirely external system outside of the cryophone (Fig. 5). The second was an internal system comprised of a six cell AA battery pack that proved to be much more manageable. Without the external power systems, the Zoom H4N would only last approximately 11.5 hours on brand new batteries. On external battery power, the systems could last for over 24 hours. The limiting factor with the cryophone was the memory capacity of the Zoom recorders. The 32 Gb SD card reached its full capacity after about 25 hours. The 9-volt batteries within the PCB pre-amps were sufficient to last over 24 hours.



Figure 4: (left) Zoomed view of cryophone comprised of a PCB triaxial accelerometer, three PCB pre-amps, and a Zoom H4N recorder. (right) Cryophone frozen into Lake Colleen.

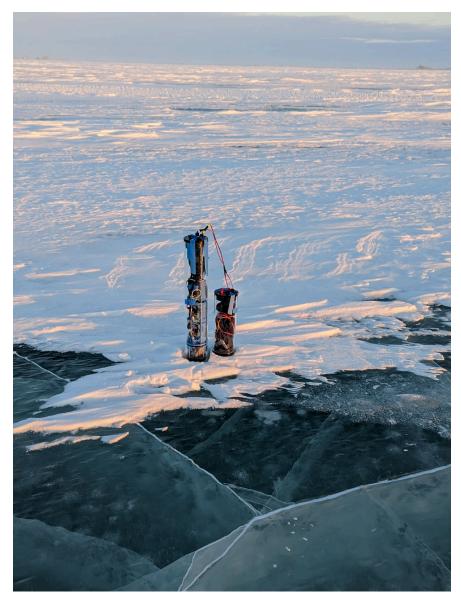


Figure 5: Cryophone and external battery capsule frozen into Lake Colleen.

B. SOURCES

Two types of sources were used for the experiment: a coherent source and an impact source. The coherent sources consisted of a Dayton Audio Sound Exciter Transducer and an Electro-Voice UW-30 pool speaker. The team nicknamed the devices the "TST." Both of the sources were controlled by an external box that held an Apple iPod, an amplifier and a battery. A hole was cut out of the corner of the box to connect to the speakers on the outside (Fig. 5). The Dayton TST was the primary speaker utilized as the Electro-Voice TST was determined to be faulty. A ten-pound ball was used to generate a mechanical, impulsive signal in the ice when dropped from waist height to impact the snow-cleared ice.



Figure 6: Dayton "Tactile Sound Transducer (TST)" sound source and external power box consisting of an iPod, amplifier and battery located on Lake Colleen with a cryophone located 25 meters away.

Table 1 Equipment list in each cryophone and Source

Table 1 Equipment list in each cryophone and Source				
Cryophone	Equipment	Serial		
		Number		
C1	PCB Accelerometer	3369		
	PCB Pre Amp	00039497		
	PCB Pre Amp	00039511		
	PCB Pre Amp	00039495		

	Zoom H4N Recorder	C41105371
C2	PCB Accelerometer	3368
	PCB Pre Amp	00039574
	PCB Pre Amp	00039575
	PCB Pre Amp	00039563
	Zoom H4N Recorder	C41113978
C3	PCB Accelerometer	3375
	PCB Pre Amp	00039496
	PCB Pre Amp	00039494
	PCB Pre Amp	00039493
	Zoom H4N Recorder	C41113979
Source Box	Equipment	Serial
		Number
	Lepal Amplifier	LP1601S
	Battery	N/A
	iPod	N/A
	Electro-Voice Speaker	UW30 22012
	Dayton Exciter	HDN-8

C. VLA AND CTD

A Vertical Line Array (VLA) was constructed to acquire acoustical data at two depths in the water column. The VLA line consisted of 200 meters of line with one SoundTrap ST300 at the bottom and a second SoundTrap ST300 125 meters above the bottom of the line. Between both SoundTraps there were four light bulbs tied to the line to acquire impulse data when they imploded due to pressure. To have an accurate understanding of the environment, an RBR Brevio CTD was utilized. A list of the equipment can be seen in Table 2.

Table 2 Hydrophone and CTD Equipment

Equipment	Serial Number
CTD	205304
SoundTrap (ST300)	6222
SoundTrap (ST300)	6235

IV. EXPERIMENT

The experiment was conducted during 5-11 March, 2023 and consisted of two sites: Lake Colleen and a sea ice floe in the southern Beaufort Sea. All equipment on Lake Colleen was deployed approximately at the center of the lake and on first-year ice on the sea ice floe. Lake Colleen tests were designed to study the acoustical properties of freshwater ice and to perfect the cryophone system. On the sea ice floe, the study was multi-faceted. First, a better understanding of wave propagation characteristics in sea ice was sought, with the use of mechanically impulsive and coherent sound sources. Second, the sound propagation through three media (water, ice, and air) was observed and analyzed. The equipment used in the sea ice test on 11-March consisted of a VLA, three cryophones in a 75m line, a coherent source and an impact source (Fig. 7).

Fig. 8 shows the waveform (top) and spectrogram (bottom) of the in-ice signals generated by dropping the 10-pound lead ball on a small aluminum place on the ice and observed by the cryophones placed at ranges of 25, 50 and 75 meters from the source. Signals generated by the TST were also observed at all three cryophones, demonstrating the feasibility of remote ice property inference via acoustic signals generated by an autonomous, battery-powered coherent source.

The use of light bulbs, which implode under pressure at depth, make excellent low cost and environmentally friendly sound sources (Heard *et al.*, 1997). The impulsive signals generated by light bulb implosions were detected by ear above the ice, by the cryophone array on top of the ice floe (Fig. 9) and by the two hydrophones in the water. These signals further demonstrated that waterborne acoustic signals couple to the ice sheet and can be detected by the cryophones. Future studies will focus on the use of EMATTS as mobile sources that will transmit signals from greater distances (~10 km). Future work will also investigate the use of signals from lightbulb implosions to characterize the seabed and under-ice rough surface properties.

During a flyover by the RCAF plane, the two SoundTrap hydrophones clearly captured the broadband signal 150 m below the ice (Fig. 10). Additionally, the closest point of approach and Doppler-shifted signals were captured by the cryophones on the surface, suggesting ice-mounted cryophones may be used to detect and track aircraft in addition to underwater and in-ice acoustic signals. Future studies seek to create a cross domain vs. 360-degree acoustical view of the environment with the use of a single ice-imbedded instrument.

The field log for the experiment can be found in Table 3.



Figure 7: March 10th: Sea ice floe experiment. VLA (foreground, deployed through a hole under the orange reel), and Cryophone 1, 2, and 3 at 25, 50 and 75 m from VLA hole.

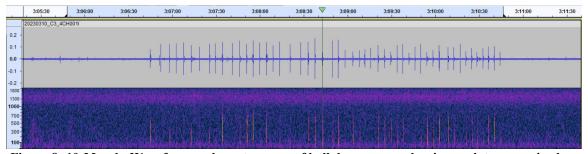


Figure 8: 10-March: Waveform and spectrogram of ball drops on an aluminum plate as received on Cryophone 3 (75 meters away). X-axis is in hours: minutes: seconds. Units for waveform amplitude and spectrogram frequency on the y-axes are in dB and Hz, respectively.)



Figure 9: 10-March Waveform and spectrogram of light bulb implosions recorded at Cryophone 3. The first signal at 2:30:46 is direct path and the second signal at ~2:30:50 is the bottom bounce return. X-axis is in hours: minutes: seconds. Waveform and spectrograms y-axes are in dB and Hz, respectively.

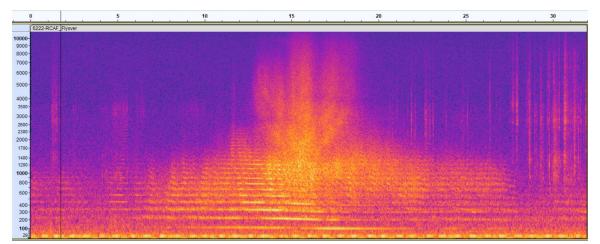


Figure 10: Spectrogram of 10-March 1RCAF plane flying over the VLA as heard from the SoundTrap at 150 meters of depth. Y-axis is in Hz and the X-axis is in seconds.

Table 3 Field log

AKST-9 UTC	Log Entry
------------	-----------

3-MAR-23		Lake Colleen
~1253	2153	Cryophone 1 (C1) frozen into ice on lake Colleen.
1256	2156	Spiral footsteps around the cryophone.
1258	2158	Spiral stops.
1259	2159	Second, larger, spiral footsteps begin.
1300	2200	Second spiral ends.
1301	2201	Third spiral footsteps begin.
1303	2203	Third spiral ends.
1308	2208	Ball drops on north transect begin.
~1320	2220	Ball drops on west transect begin.
1410	2310	Dayton TST signal started on north transect of cryophone (~5 meters away)
1415	2315	Dayton TST signal started on west transect of cryophone (~5 meters away)

4-MAR-23		Lake Colleen
		Cryophones installed in a line (C1-250m-C2-250m-C3) south to north at 250 meters
1053	1953	apart.
1055	1955	50 ball drops at 28 m from C1.
1106	2006	50 ball drops at 98 m from the C1.
1506	0006	Dayton audio TST frozen into ice at 28 m from C1.
1604	0104	TST volume turned up.
		Dayton TST switched out for Electro-Voice TST. Electro-Voice TST not performing
1715	0215	optimally. TSTs recovered. Cryophones left to capture ambient noise in lake ice.
1800	0300	Cryophones recovered.

5-MAR-23		Lake Colleen
		Cryophones installed in a line (C2-125m-C3-125m-C1) south to north, 125 meters
1700	0200	apart.
		Ball drops in a line parallel to the line of cryophones to test for triangulation.
1720	0220	Cryophones left out overnight.

6-MAR-23		Lake Colleen
		Cryophones checked on. C3 was dead. C3 recovered. C1 was moved into place of C3.
0920	1820	Cryophones now at 0 and 125 meters (C2-125m-C1).
0943	1843	50 ball drops at 20.3 meters from C2.
0952	1852	Dayton TST frozen into place and activated.
1300	2200	Last two cryophones recovered. TST left in place but deactivated.
1730	0230	C1 and C2 deployed at 0 and 125 meters south to north. (C1-125m-C2)
1745	0245	TST reactivated.
1800	0300	C3 deployed 125 m west C1. Cryophones are now in a triangular formation.
1805	0305	50 ball drops 20 meters south of C1.

7-MAR-23		Lake Colleen
~0900	1800	C1 and C2 recovered. C3 left out to test 24 hour durability.

		C1 and C2 deployed in a westerly tract at 25 and 50 meters from the TST (TST-25m-C1-25m-C2). C3 recovered. 50 ball drops 25 meters from C1. C1 and C2 left
~1700	0200	overnight.

8-MAR-23		Lake Colleen
		Recovered C1, C2 and the iPod to update the sound file. Completely iced in
0900	1800	(encapsulated) the Electro-Voice TST.
		C1 and C2 placed at 25 and 50 meters west of TST (TST-25m-C1-25m-C2). IPod
1330	2130	connected and transmitting signal.
1530	0030	Cryophones recovered. Electro-Voice TST recovered.

9-MAR-23		Sea Ice (GPS Coordinates: 72.78041, -143.52389)
1230	2130	Flight departs for Sea Ice.
1400	2300	Flight lands on Sea Ice.
~1430	2330	Hole drilled into sea ice. CTD cast.
1550	0050	C1 deployed.
1607	0107	Dayton TST frozen into ice @ 100 meters from cryophone. Began transmitting.
1613	0113	TST stopped and removed from ice.
1619	0119	TST frozen into ice @ 200 meters from cryophone. Began transmitting.
1625	0125	TST stopped and removed from ice.
1635	0135	Cryophone removed from Ice.
1650	0150	Flight departs sea ice.

10-MAR-23		Sea Ice (GPS Coordinates: 72.70944, -143.46263)
~1030	1930	Flight departs for the sea ice.
~1210	2110	Flight lands on sea ice.
		Hole drilled into ice. Three cryophones deployed at 25, 50, and 75 meters from the
~1220	2120	hole (Hole-25m-C1-25m-C2-25m-C3).
		VLA with two SoundTraps and light bulbs deployed down the hole. Three Light bulb
1226	2126	impulses detected.
1235	2135	RCAF plane took off next to sensors.
1237	2137	RCAF flew over sensors.
1238	2138	RCAF flew by (not over).
1253	2153	50 ball drops on ice 2 meters in front of hole, 23 meters from the C1.
1301	2201	50 ball drops on metal plate. (same location)
1310	2210	Dayton TST frozen into ice. (same location). Recordings begin.
1326	2226	TST stopped and removed.
1350	2250	TST frozen into ice at 25 meters from hole (50 meters from C1.) Recordings begin.
~1420	2320	VLA pulled up. Reloaded light bulbs onto line. Line redeployed to 200 meters depth.
~1500	0000	VLA, cryophones, and TST recovered.
~1515	0015	Flight departs the ice.

V. LESSONS LEARNED

Throughout the experiment the team was constantly learning new and more efficient ways to conduct tests at ARCEX23 and future tests in Ice Exercise 2024 (ICEX24). Lessons learned are listed in Table 4.

Table 4: Lessons Learned

Item	Lessons Learned
Ball Drops	Be slow and deliberate. Ensure that there is a pause of a couple seconds between each ball drop with no movement on the ice.
	 Use ball drops for longer ranges (walking on the snow is more suitable for shorter range tests)
	 Install LEDs onto cryophones for ease of identification in daytime and at night.
Cryophones	• Ensure cryophones are calibrated to obtain proper attenuation.
	 Sync the cryophones to GPS time to check for clock drift.
	 Allow time for the water to freeze around the cryophones for better coupling to the ice.
Cryophone Placement	• Wait at least 10-15 minutes for the water to completely freeze or the cryophone will pick up the sounds of the ice hardening around it.
H4N Zoom Recorders	Log the start time of each zoom recorder. The Zoom recorders are not stamped with a real time of day, only duration of recording.
22.12.1.2.2.3.11.2.3.3.13.3.13	 Ensure the SD cards are reformatted before every use to ensure the Zoom recorder is properly writing to it.

Wiring	 Handle wiring with care, they become brittle in the extreme cold. Acquire winterized wiring for future experiments.
TST	 Due to vibrations from the TST it will slowly break up the coupling of the ice surrounding it. Attach the TST to a metal plate to prevent vibrations from breaking the ice.
Coherent Signal	Schedule the signals to be more regular. A five second break between each signal is too long.
Batteries	 Do not use Li-ion batteries with embedded electronics to power Cryophones. Embedded electronics cause electronic noise that the cryophones can pick up. Use external Li AA battery packs instead. Bring more batteries for future experiments.
Hydrophones	 Deploy pressure sensors with each hydrophone to know their exact depths. Sync the hydrophones to GPS time to check for clock drift.
Light bulbs	Ensure there is no movement for a few minutes after the implosion so that the signal can successfully complete all propagation paths (i.e. Bottom Bounce) without being contaminated by surface noise.
Miscellaneous	 Bring a small garden trowel for ease of digging in snow/ice. Ensure goggles worn by team are of "arctic grade". (Fogging was a prevalent problem.)

 Bring large backpacks to transport
cryophones/gear more easily.

ACKNOWLEDGEMENTS

A special thanks to the Arctic Submarine Lab (ASL) for their support with logistics. Among those at ASL, a specific thanks goes to Howard Reece, Theo Goda, Ann Hill and Travis Major for their overall support before, during, and after the fieldwork.

Thank you to the Naval Ice Center (NIC) ice analysts who worked daily to locate and track the optimal sea ice floes for this experiment.

We appreciate the Royal Canadian Air Force (RCAF) and Kenn Borek Air for their support with flying the team and equipment to the sea ice floe.

REFERENCES

- Heard, G. J., McDonald, M., Chapman, N. R., & Jashke, L. (1997). Underwater Light Bulb Implosions A Useful Acoustic Source. *IEEE Oceans*, (pp. 1-8).
- Stein, P. J., Euerle, S. E., & Parinella, J. C. (1998). nversion of pack ice elastic wave data to obtain ice . *JOURNAL OF GEOPHYSICAL RESEARCH, VOL. 103, NO. CI0*, 21,783-21,793.
- Xie, Y., & Farmer, D. M. (1994). Seismic-acoustic sensing of sea ice wave mechanical properties. *Journal of Geophysical Research. Vol. 99, NO. C4*, 7771-7786.

INITIAL DISTRIBUTION LIST

- 1. Defense Technical Information Center Ft. Belvoir, Virginia
- 2. Dudley Knox Library Naval Postgraduate School Monterey, California
- 3. Research Sponsored Programs Office, Code 41 Naval Postgraduate School Monterey, CA 93943