



Calhoun: The NPS Institutional Archive
DSpace Repository

Faculty and Researchers

Faculty and Researchers' Publications

1988-05-19

Analysis of Free Electron Laser Performance Utilizing the National Bureau of Standards' CW Microtron

Tang, Cha-Mei; Sprangle, Phillip; Penner, Samuel;
Maruyama, Xavier K.

<https://hdl.handle.net/10945/43155>

This publication is a work of the U.S. Government as defined in Title 17, United States Code, Section 101. Copyright protection is not available for this work in the United States.

Downloaded from NPS Archive: Calhoun



Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

<http://www.nps.edu/library>

Naval Research Laboratory

Washington, DC 20375-5000



NRL Memorandum Report 6146

**Analysis of Free Electron Laser Performance Utilizing
the National Bureau of Standards' CW Microtron**

CHA-MEI TANG AND PHILLIP SPRANGLE

Plasma Physics Division

SAMUEL PENNER

*Center for Radiation Research
National Bureau of Standards
Gaithersburg, MD 20899*

XAVIER K. MARUYAMA

*Department of Physics
Naval Postgraduate School
Monterey, CA 93940*

May 19, 1988

Approved for public release; distribution unlimited.

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			Approved for public release; distribution unlimited.		
4. PERFORMING ORGANIZATION REPORT NUMBER(S) NRL Memorandum Report 6146			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION Naval Research Laboratory		6b. OFFICE SYMBOL (If applicable) 4790	7a. NAME OF MONITORING ORGANIZATION Office of Naval Research		
6c. ADDRESS (City, State, and ZIP Code) Washington, DC 20375-5000			7b. ADDRESS (City, State, and ZIP Code) Arlington, VA 22217		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Strategic Defense Init. Org.		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER JO#47-0899-0-8		
8c. ADDRESS (City, State, and ZIP Code) Washington, DC 20301-7100			10. SOURCE OF FUNDING NUMBERS		
	PROGRAM ELEMENT NO.	PROJECT NO. Cont. #	TASK NO.	WORK UNIT ACCESSION NO.	
		N00014-87-f	-0066		
11. TITLE (Include Security Classification) Analysis of Free Electron Laser Performance Utilizing the National Bureau of Standards' CW Microtron					
12. PERSONAL AUTHOR(S) Tang, Cha-Mei, Sprangle, Phillip, Penner,* Samuel, and Maruyama,** Xavier K.					
13a. TYPE OF REPORT Interim		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day) 1988 May 19	15. PAGE COUNT 38
16. SUPPLEMENTARY NOTATION *Ctr. for Radiation Res. NBS, Gaithersburg, MD 20899 **Dept. of Physics, Naval Postgraduate School, Monterey, CA 93943					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Free electron lasers racetrack microtron 3-D simulations		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) <p>The National Bureau of Standards' (NBS) CW racetrack microtron (RTM) will be utilized as a driver for a free electron laser (FEL) oscillator. The NBS RTM possesses many exceptional properties of value for the FEL: i) CW operation, ii) energy from 20-185 MeV, iii) small energy spread and emittance, iv) excellent energy stability, and v) high average power. The 1-D FEL gain formula predicts that the FEL would oscillate at the fundamental approximately from 0.25 μm to 10 μm when up-grading the peak current to $\geq 2\text{A}$. In this paper, we present 3-D self-consistent numerical results including several realistic effects, such as emittance, betatron oscillations, diffraction and refraction. The results indicate that the design value of the transverse emittance is small enough that it does not degrade the FEL performance for intermediate to long wavelengths, and only slightly degrades the performance at the shortest wavelength under consideration. Due to the good emittance, the current density is high enough that focusing, or guiding, beings to manifest itself for wavelengths $> 2.0 \mu\text{m}$.</p>					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE INDIVIDUAL Cha-Mei Tang			22b. TELEPHONE (Include Area Code) (200) 767-4148	22c. OFFICE SYMBOL 4791	

DD Form 1473, JUN 86

Previous editions are obsolete.

SECURITY CLASSIFICATION OF THIS PAGE

S/N 0102-LF-014-6603

CONTENTS

INTRODUCTION..... 1
1-D FREE ELECTRON LASER ANALYSIS..... 1
3-D EFFECTS ON THE GAIN..... 3
CONCLUSIONS..... 5
ACKNOWLEDGMENT..... 5
REFERENCES..... 6

Analysis of Free Electron Laser Performance Utilizing the National Bureau of Standards' CW Microtron

Introduction

An FEL facility for applications, primarily in biomedical and material science research as well as for basic physics and chemistry, is to be situated at the National Bureau of Standards^{1,2}. A CW 185 MeV racetrack microtron (RTM)³ is under construction. The NBS Accelerator Laboratory consists of a series of interconnected, individually shielded, underground halls. The updated layout is indicated in Fig. 1. The FEL is expected to be operational by 1990.

The major limitation of an RTM as an FEL driver is that its peak current capability is lower than electron linacs which operate in the same energy range. However, the RTM is superior to pulsed linacs in energy spread and emittance. The RTM is comparable to a storage ring in terms of beam emittance and energy spread, but there is no restriction on insertion length or "stay clear" aperture. The beam energy can be varied continuously over a wide range without significant loss of performance. In addition, microtrons are compact and energy efficient. Because of the CW nature of the RTM, the generation of coherent photons is not hindered by a finite macropulse length.

The original design parameters of the NBS RTM are given in Refs. 1-3. The design calculations indicate a longitudinal emittance $\epsilon_L < 30$ keV-degrees and a normalized transverse emittance^{1,2} $\epsilon_N < 10$ mm-mrad. Based on recent measurements of the performance of the 5 MeV injector linac, the actual values of both the longitudinal and transverse emittance are expected to be smaller than the design values. The injector system must be upgraded to provide a peak current of ≥ 2 A in 3.5 psec micropulses, giving electron pulse length $\ell_{eb} \simeq 0.1$ cm. In order to keep the average electron beam power within the capability of the existing RF power system, the new injector will fill only a small fraction of the RF buckets (e.g., 1/24, 1/120 depending on electron beam energy). We are proceeding with a design of a photocathode injector system for this upgrade.

1-D Free Electron Laser Analysis

A first order evaluation of the FEL performance of the NBS RTM can be obtained from the 1-D small signal low gain formula⁴. The results indicate that sufficient gain can

be obtained at fundamental wavelengths in the range from $10 \mu m > \lambda > 0.25 \mu m$. The formula for the electric field amplitude gain G in the small signal, low gain regime, can be written as

$$G = F_1^2 \frac{\pi^2}{\sigma_R} \frac{I}{I_A} \frac{\lambda_w^2}{\gamma_o^3} K^2 N^3 \frac{\partial}{\partial \nu} \left(\frac{\sin \nu}{\nu} \right)^2,$$

where N is the number of wiggler periods, γ_o is the initial relativistic gamma factor, $\sigma_R = \pi r_o^2$ is the cross-sectional area of the radiation, r_o is the minimum $1/e$ radius of the Gaussian radiation field amplitude, $I_A = 17 \times 10^3$ A, I is the current in Amperes, $K = (|e|B_w \lambda_w / 2\pi m_o c^2)_{RMS}$ is the wiggler parameter, B_w is the magnetic field in the wiggler, λ_w is the wavelength of the wiggler, $F_1 = J_o(b) - J_1(b)$ for a linearly polarized wiggler, $b = K^2/2(1+K^2)$, $\nu = -N\lambda(\omega - \omega_o)/2c$ is the normalized frequency mismatch, and $\omega_o \sim 2\gamma^2 c(2\pi/\lambda_w)/(1+K^2)$ is the resonant angular frequency. The function $\partial/\partial \nu(\sin \nu/\nu)^2$ has a maximum value of 0.54 when $\nu = -1.3$.

The power gain can be obtained by

$$G_p = (1 + G)^2 - 1.$$

In the low gain regime, $G_p \simeq 2G$. The FEL will oscillate when the power gain is greater than the losses per pass in the resonator. The 1-D gain formula is only a rough estimate. It is sensitive to the choice of filling factor.

The conceptual design consists of a linearly polarized wiggler with a period of $\lambda_w = 2.8$ cm, and a nominal magnetic field amplitude of $B_{wo} = 5400$ G. This can be constructed with a hybrid wiggler design with the gap separating the wiggler poles of $g = 1.0$ cm. A wiggler can be constructed conceptually in more than one section, such that a wiggler of shorter length can also be available. A shorter wiggler and a corresponding vacuum chamber may be necessary for long wavelength operation.

Figure 2 is a plot of the 1-D maximum small signal power gain versus wavelength, assuming a conservative peak current of 2 A. The open circles (o) are obtained with electron beam energies of 25, 50, 75, 125, and 175 MeV. The solid curves are obtained for the same electron beam energies, but varying the wiggler amplitude from $0.6B_{wo}$ to B_{wo} . The magnetic field in the wiggler is to be changed by varying the gap between the poles

from 1.4 cm to 1.0 cm. As the magnetic field decreases, the wavelength of the radiation decreases, and the gain is reduced.

3-D Effects on the Gain

Since FELs are not actually 1-D, 3-D effects will change the gain. Some of the 3-D effects that we will examine in this paper are finite transverse emittance, radiation diffraction and refraction, and some effects associated with finite-length electron pulses.

We will assess these three-dimensional effects using a fully 3-D self-consistent computer code, SHERA, developed at the Naval Research Laboratory. The formulation of the wave equation is based on the source dependent expansion⁵ of the radiation field, and the electron dynamics⁶ are evaluated self-consistently. We assume a waterbag distribution in the 4-D transverse emittance space, which leads to a parabolic profile for the electron beam density. Since the energy spread of the NBS RTM is very small, it will not be considered; and we will also not treat the effects of pulse slippage on the gain. The radiations are taken to have a Rayleigh length of 175 cm with the minimum radiation waist located at the center of the wiggler. Results for two different operating regimes will be presented.

The effect of the emittance on the performance of the FEL will be more important for short wavelength operations. Thus, our first example will be for $\lambda = 0.23 \mu\text{m}$ with $\gamma_o = 350$. The pulse slippage distance, $N\lambda = 0.003 \text{ cm}$, is much shorter than the electron pulse length, ℓ_{eb} . The minimum $1/e$ radiation field amplitude waist is $r_o = 3.57 \times 10^{-2} \text{ cm}$. Plots of the power gain, G_p , versus the normalized frequency mismatch, ν , are shown in Figure 3. Curve (a) gives the 1-D estimate of the gain. Curves (b), (c) and (d) are the gains calculated from the computer code for normalized transverse emittance of $\epsilon_N = 5, 10$ and 20 mm mrad , respectively. The radii of the electron beams were determined by properly matching the beam into the wiggler, i.e., the radii of the beams inside the wiggler is uniform. The matched beam radius condition is

$$r_{eb} = \left(\frac{\epsilon_N}{\gamma K_\beta} \right)^{1/2}$$

where $K_\beta = \sqrt{2\pi K/\lambda_w} \gamma$ is the betatron wavenumber for wiggler with parabolic pole faces⁷, where the focusing in both transverse directions is equal. The matched edge radius of the

electron beam can be rewritten as

$$r_{eb} = \left(\frac{\lambda_w \epsilon_N}{\sqrt{2\pi K}} \right)^{1/2},$$

independent of the beam energy. The matched edge radii of the electron beam are $r_{eb} = 1.77 \times 10^{-2}$, 2.50×10^{-2} and 3.54×10^{-2} cm for normalized edge transverse emittances of $\epsilon_N = 5$, 10 and 20 mm mrad, respectively. If the emittance becomes larger than 20 mm mrad, the radius of the electron beam will become larger than the radiation spot size, and the gain will be substantially reduced.

The effect of finite emittance on the gain is negligible for $\lambda = 1.25 \mu\text{m}$ with $\gamma_o = 150$. The pulse slippage distance in this case is 0.016 cm, and it is still unimportant. Figure 4 shows plots of the power gain, G_p , versus the normalized frequency mismatch, ν , similar to Fig. 3. Again, the curve (a) gives the 1-D estimate of gain. Curves (b), (c) and (d) are the gains calculated from the computer code for normalized emittance of $\epsilon_N = 5$, 10 and 20 mm mrad, respectively. Since the wavelength is longer, the minimum $1/e$ radiation field amplitude waist becomes $r_o = 8.3 \times 10^{-2}$ cm, and the electron beam radii are much smaller than the radiation waist. The gain at $\lambda = 1.25 \mu\text{m}$ is insensitive to the design value of the finite transverse emittance.

Figures 3 and 4 also show a shift of the zero crossing of the gain curves obtained from 3-D simulation. This shift comes from the change in the phase of the diffracting radiation field. It has no real important effect on the oscillation criteria for the examples under consideration.

Figure 5 plots the maximum 3-D power gain versus wavelength with a peak current of 2 A, for normalized emittances of 5, 10, and 20 mm mrad. Each curve is obtained for the identified electron beam energy, but varying the magnetic wiggler amplitude from B_{wo} to $0.6B_{wo}$, where the longer wavelength correspond to the larger magnetic field. Normalized emittance is very good in the long wavelength operating regime. In the shortest wavelength operating regime, the normalized emittance larger than 5 mm mrad should be avoided.

Since the current is a function of axial position in a finite length electron pulse, and pulse slippage is unimportant, the local gain is a function of the local current in the electron

pulse. For the first example at $\lambda = 0.23 \mu\text{m}$ with normalized transverse edge emittance $\epsilon_N = 10 \text{ mm mrad}$, the simulations indicate that the gain is proportional to the local current, consistent with the 1-D formula. For the second example at $\lambda = 1.25 \mu\text{m}$, the gain increases faster than the linear power of the current. Figure 6 is a plot of normalized power gain, i.e., power gain from simulation divided by the maximum 1-D power gain, versus the frequency mismatch at $\lambda = 1.25 \mu\text{m}$ with normalized transverse edge emittance $\epsilon_N = 10 \text{ mm mrad}$ for three different currents: (a) $I = 4.0 \text{ A}$, (b) $I = 2.0 \text{ A}$ and (c) $I = 0.5 \text{ A}$. We find that the normalized gain increases as current increases. This can be explained by the self-focusing or guiding phenomenon^{5,8-11} of the FEL. This is most easily observed in the plots of the normalized $1/e$ Gaussian radiation field amplitude radius, shown in Fig. 7. For $I = 0.5 \text{ A}$, the radiation radius behaves like a free space resonator radiation field, curve (- - -). For $I = 2 \text{ A}$, the radiation radius is less than the free space radius at the end of the wiggler as self-focusing begins to show, curve (—). If the current can be increased to 4 A , the radiation becomes even more focused, curve (.....). The reason that self-focusing is evident at such low current is that the emittance is very good and current density is high throughout the interaction region, i.e., high beam brightness $B_N = 2I/(\pi^2 \epsilon_N^2) > 4 \times 10^9 \text{ A/m}^2/\text{rad}^2$, where $I > 2 \text{ A}$ and edge emittance $\epsilon_N = 10 \text{ mm mrad}$.

Conclusions

The 3-D self-consistent simulation results from the computer code SHERA indicate that the design value of the transverse emittance is very good, so that it does not degrade the FEL performance for intermediate to long wavelengths. For the shortest wavelength under consideration, emittance larger than 5 mm mrad should be avoided. Due to the good emittance, the current density is high enough that focusing, or guiding, begins to manifest itself for wavelengths $> 2.0 \mu\text{m}$.

Acknowledgment

[†] Funded by SDIO through ONR contract No. N00014-87F-0066.

References

- [1] C.M. Tang, P. Sprangle, S. Penner, B.M. Kincaid and R.R. Freeman, Nucl. Instr. and Meth. A250, 278 (1986). Also in: Free Electron Lasers, Proc. 7th Int. Conf. on FELs, eds., E.T. Scharlemann and D. Prosnitz (North-Holland, Amsterdam, 1986) p. 278.
- [2] X.K. Maruyama and S. Penner, C.M. Tang and P. Sprangle, Free Electron Lasers, Proc. of the 8th Intl. FEL Conf., ed., M. W. Poole (North-Holland, Amsterdam, 1987) p. 259.
- [3] S. Penner et al., IEEE Trans. Nucl. Sci. NS-32, 2669 (1985).
- [4] P. Sprangle, R.A. Smith and V.L. Granatstein, Infrared Millimeter Waves, Vol. I, ed., K.J. Button (Academic Press, New York, 1979) p. 279.
- [5] P. Sprangle, A. Ting and C.M. Tang, Phys. Rev. Lett. 59, 202 (1987), P. Sprangle, A. Ting and C.M. Tang, Phys. Rev. A36, (1987), and P. Sprangle, A. Ting and C. M. Tang, Free Electron Lasers, Proc. of the 8th Intl. FEL Conf., eds., M. W. Poole (North-Holland, Amsterdam, 1987) p. 136.
- [6] C.M. Tang and P. Sprangle, IEEE J. of Quantum Elec. QE-21, 970 (1985).
- [7] E. T. Scharlemann, J. Appl. Phys., 58, 2154 (1985).
- [8] P. Sprangle and C.M. Tang, Appl. Phys. Lett. 39, 677 (1981). Also in: C.M. Tang and P. Sprangle, Free-Electron Generator of Coherent Radiation, Physics of Quantum Electronics, Vol. 9, eds., S.F. Jacobs, G.T. Moore, H.S. Pilloff, M. Sargent III, M.O. Scully, R. Spitzer (Eddison-Wesley, Reading, MA, 1982) p. 627.
- [9] E.T. Scharlemann, A.M. Sessler and J.S. Wurtele, Phys. Rev. Lett. 54, 1925 (1985).
- [10] G.T. Moore, Opt. Comm. 52, 46(11084), 54, 121 (1985).
- [11] M. Xie and D.A.G. Deacon, same as ref. 1, p. 426.


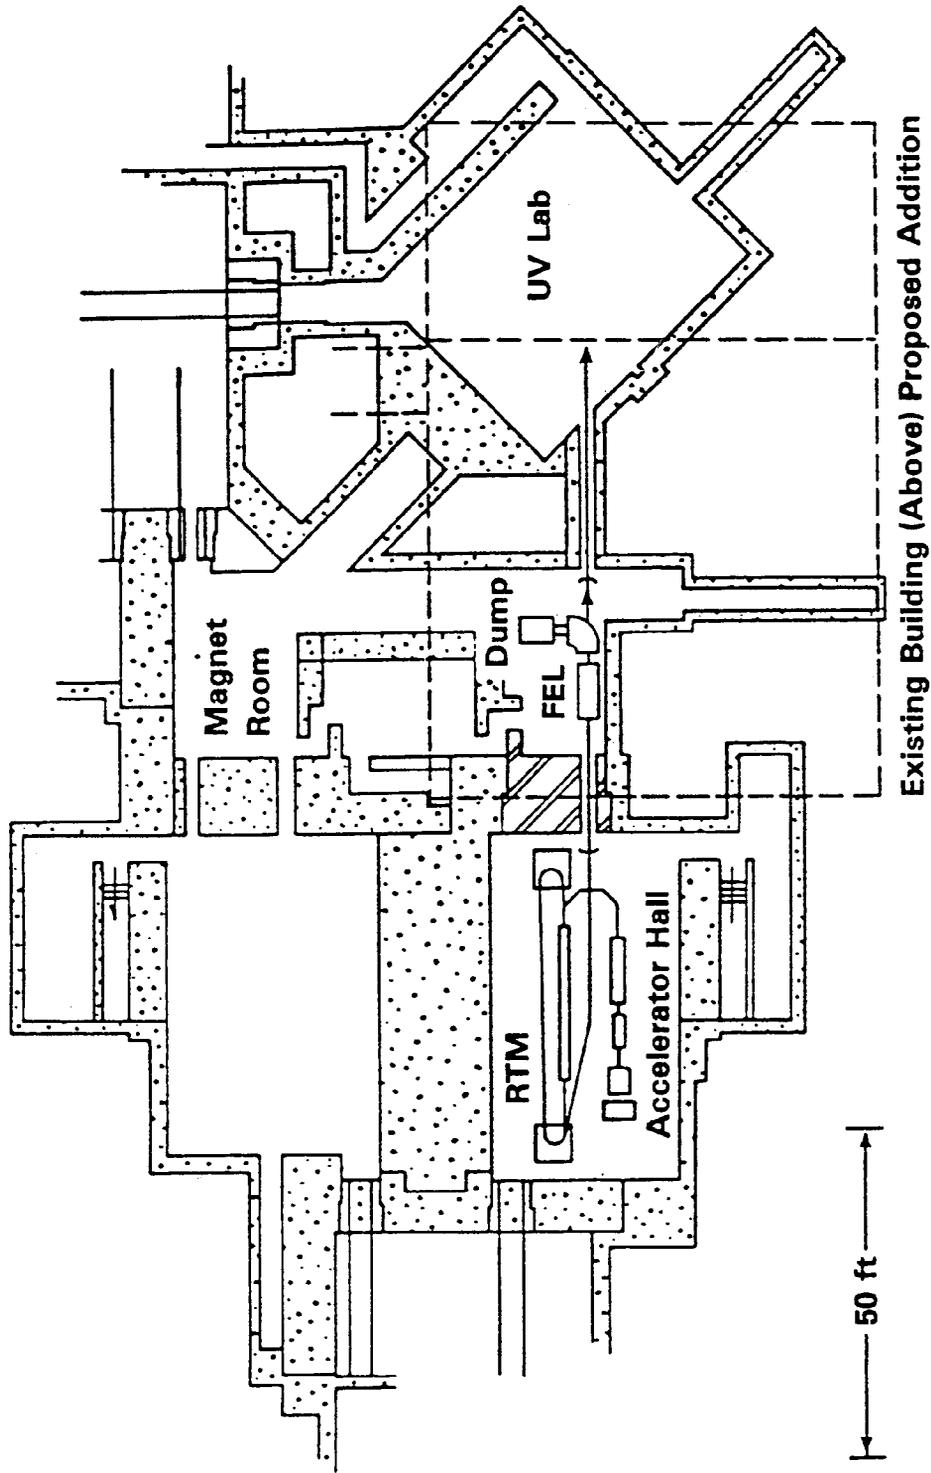


Fig. 1. Updated configuration for accelerator and FEL halls. The entire shielded complex is located 40 ft below ground level. Visible and infrared radiation will be directed to a ground level laboratory (indicated by the dashed lines) above the UV laboratory.

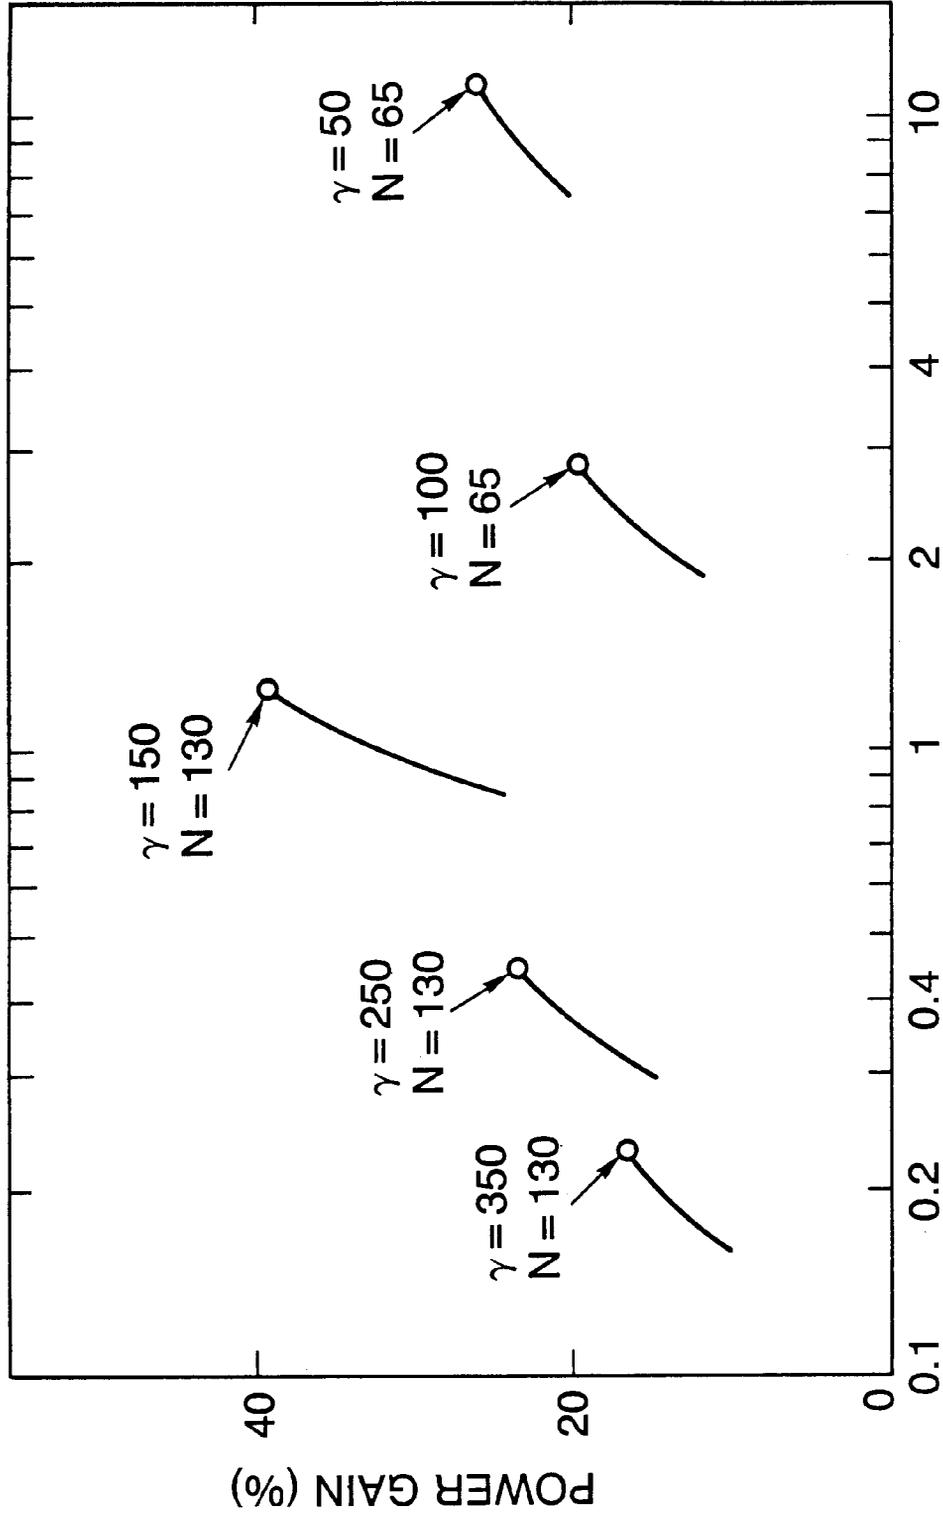

RADIATION WAVELENGTH, λ (μm)

Fig. 2. Small signal power gain versus wavelength based on 1-D calculation.

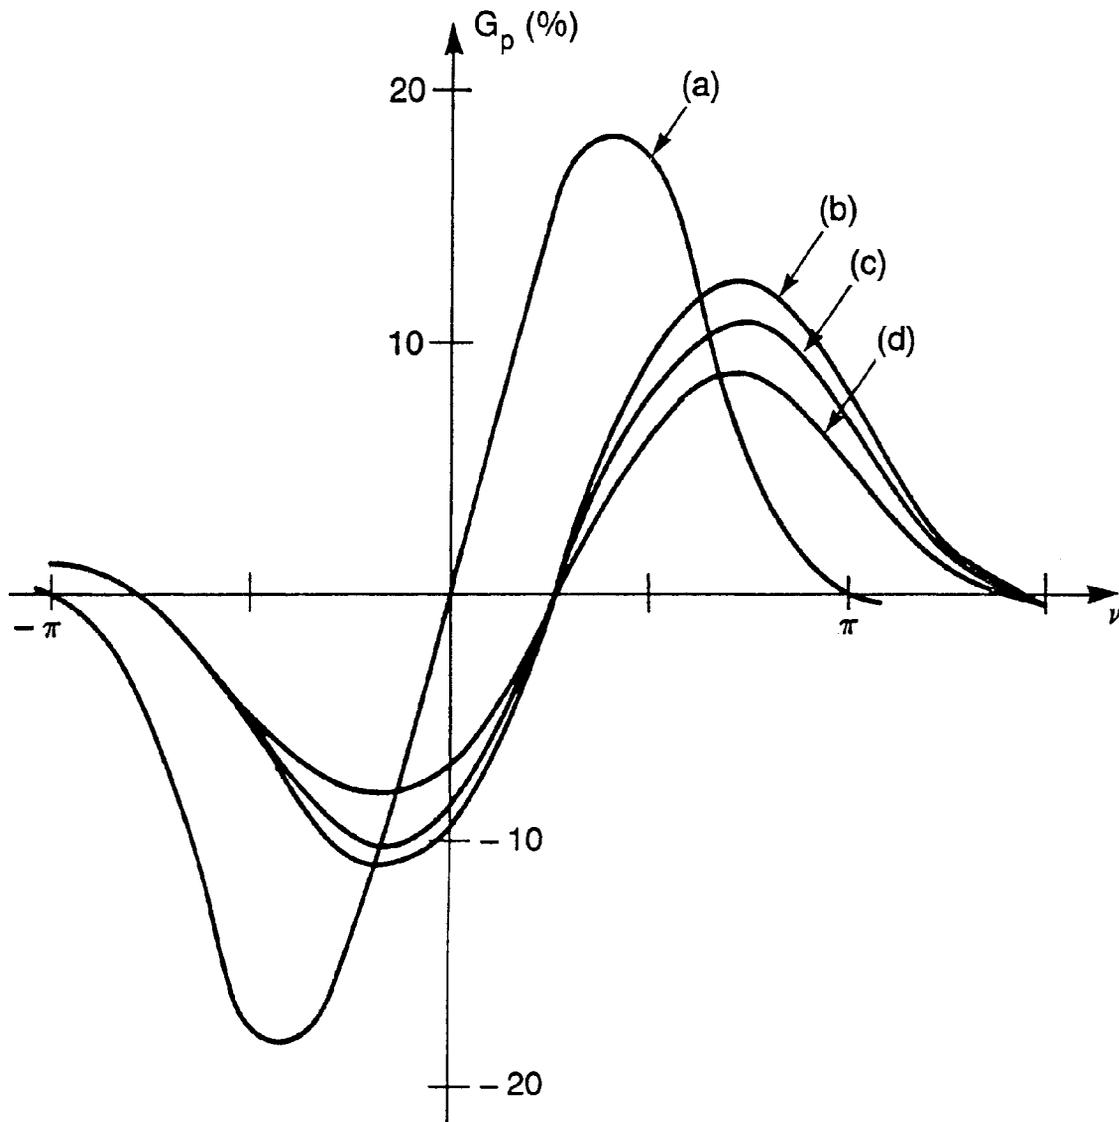


Fig. 3. Power gain, G_p , versus frequency mismatch, ν , at $\lambda = 0.23 \mu\text{m}$ with $\gamma_o = 350$. Curve (a) is based on 1-D gain formula. Curves (b), (c) and (d) are obtained from simulations with normalized transverse edge emittances of $\epsilon_N = 5, 10$ and 20 mm mrad , respectively.

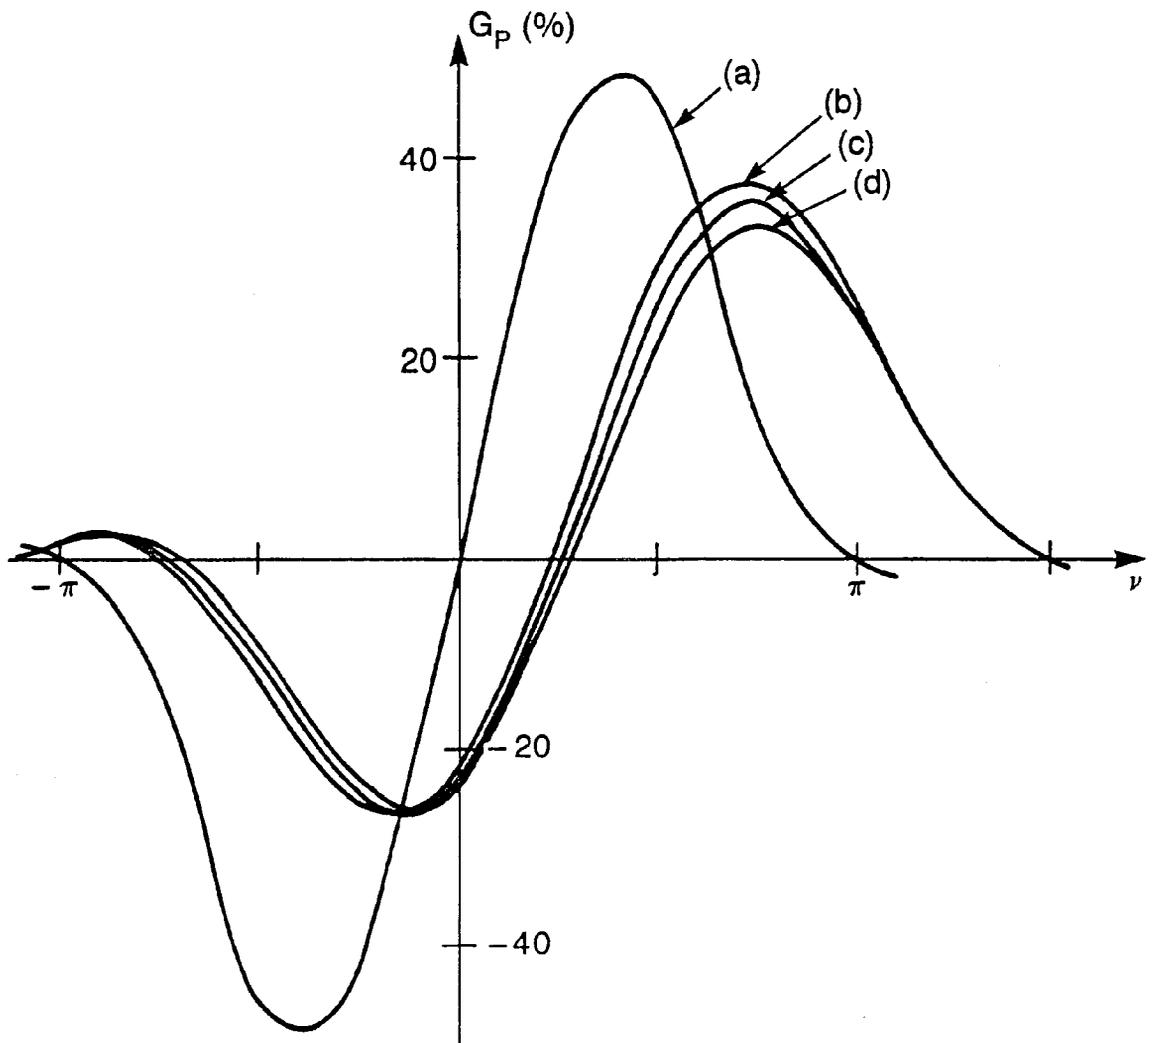


Fig. 4. Power gain, G_p , versus frequency mismatch, ν , at $\lambda = 1.25 \mu\text{m}$ with $\gamma_o = 150$. Curve (a) is based on 1-D gain formula. Curves (b), (c) and (d) are obtained from simulations with normalized transverse edge emittances of $\epsilon_N = 5, 10$ and 20 mm mrad , respectively.

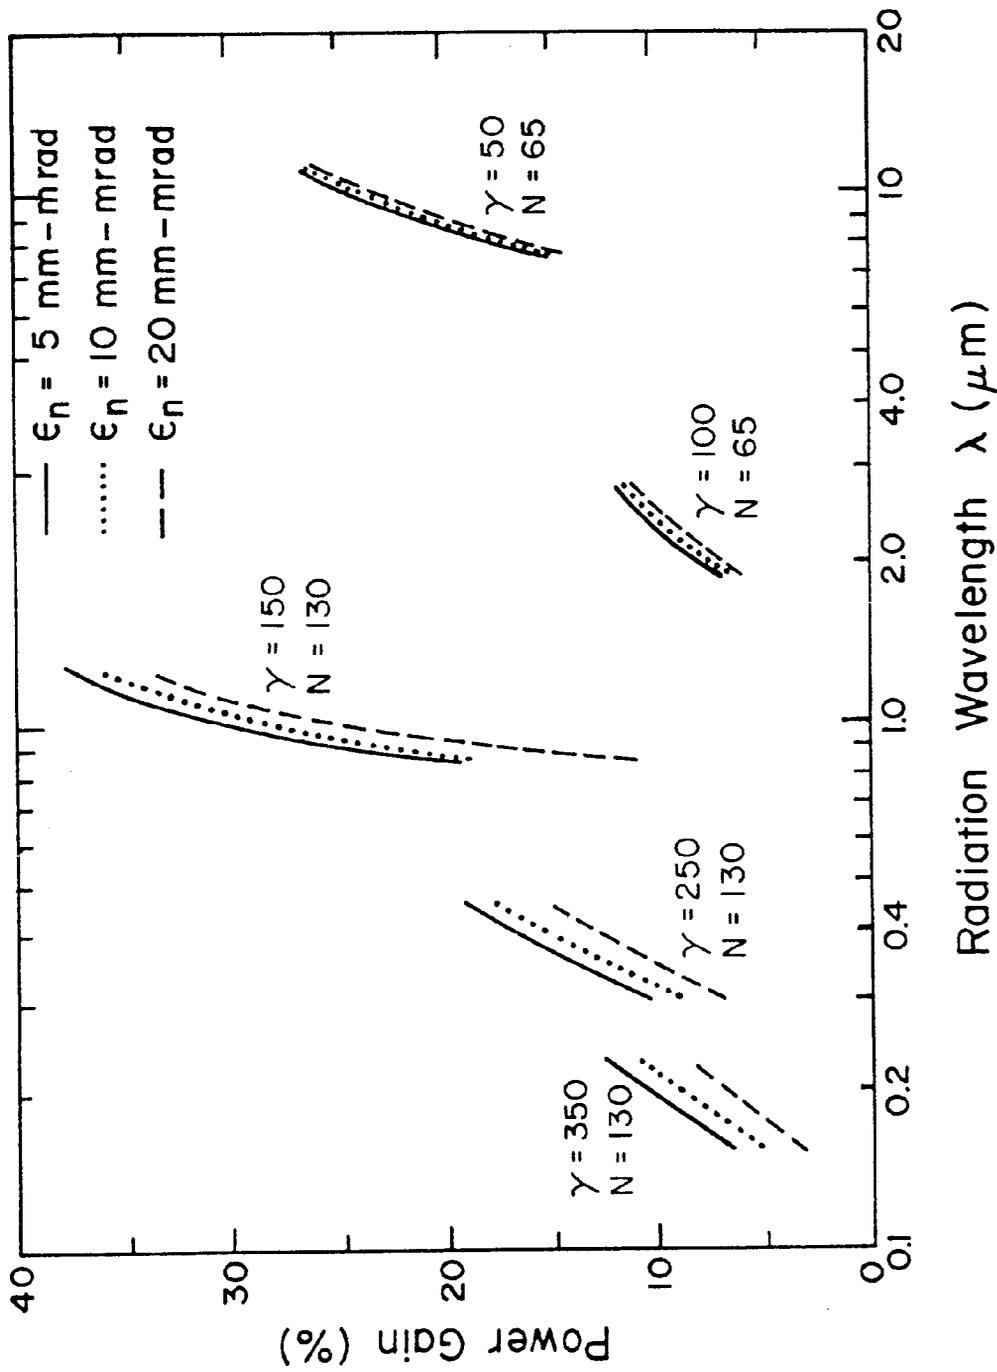


Fig. 5. Power gain versus wavelength based on a fully 3-D self-consistent simulation by varying energy and emittance of the electron beam, and the magnetic field of the wiggler.

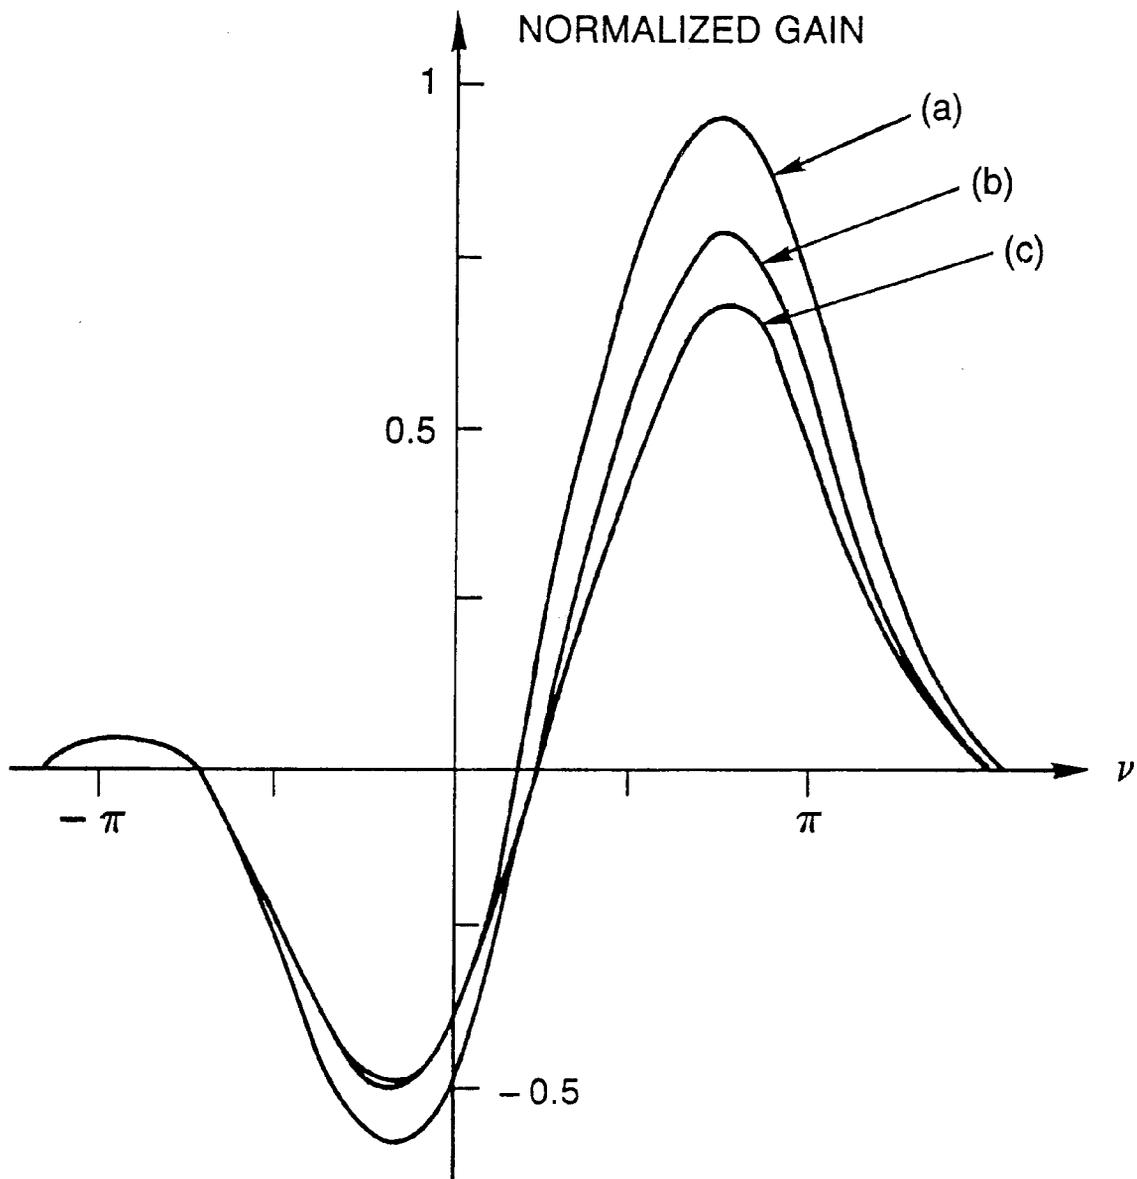


Fig. 6. Normalized gain versus frequency mismatch for $\lambda = 1.26 \mu\text{m}$ and edge emittance of $\epsilon_N = 10 \text{ mm mrad}$. Curves (a), (b) and (c) correspond to results obtained with currents of $I = 4.0, 2.0,$ and 0.5 A , respectively.

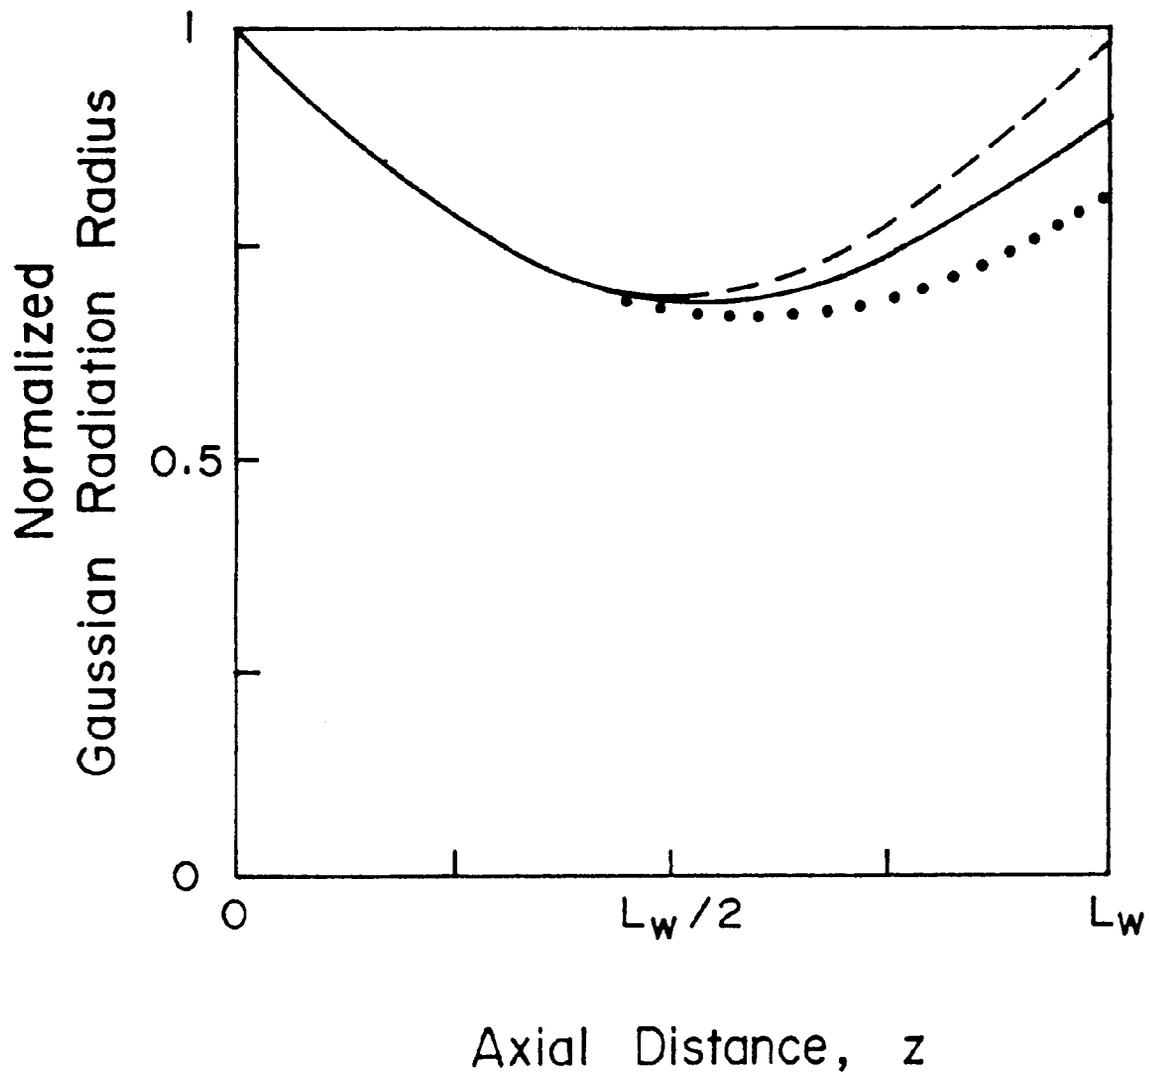


Fig. 7. Normalized $1/e$ Gaussian radiation field amplitude radius as a function of distance z in the wiggler with $\lambda = 1.25 \mu\text{m}$ and edge emittance $\epsilon_N = 10 \text{ mm mrad}$ for three different currents: (- - -) $I = 0.5 \text{ A}$, (—) $I = 2 \text{ A}$ and (.....) $I = 4 \text{ A}$.